



## PANEL S9784U TC/DP - 16/27W


LED High performance panel with selectable CCT and power

### Application

Designed for commercial and office space lighting tasks.

### Design Specifications

- UGR<19 performance
- Extruded aluminium profile with high efficiency opal diffuser, suitable for a range of installation types
- White powder coat finish
- High efficiency LED optics, CRI >80
- FlickerCONTROLLED, remote constant current non-dimmable LED driver, complete with flex and plug
- Selectable CCT 3000K/4000K/5000K, Suspended wire kits available, Emergency models compliant to AS/NZS2293, [see SEL20PK EM Power Kit](#).

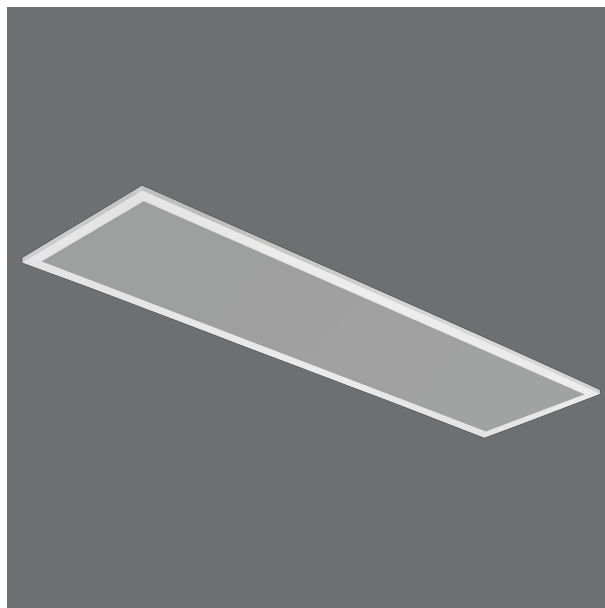



### Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **Trailing edge (excluding S9784/612), 1-10V, DALI / DSI**



### Technical Specification

Product	Model No.	Input Voltage (V/AC)	Multiple Wattage	Lumens (lm)	CCT (K)	CRI
	S9784U606TC/DP	240	16/27	2700/2850/2750	3000/4000/5000	80
	S9784U612TC/DP	240	24/40	4500/4750/4600	3000/4000/5000	80

Beam Angle (°)	Body Colour	Dim (mm)	Mass (kg)	IPART	VEET
80	WHITE	595(L) x 595(W) x 32(H)	1.8	YES	YES
80	WHITE	1195(L) x 595(W) x 32(H)		YES	YES

Note (1) : Lumens (lm) shown are for FULL POWER performance.


Note (2) : For dimmable configurations, the CCT must be specified at the time of order and the DP function is deactivated.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Photometric Data

Unit: cd C0/C180 — C90/C270

**S9784U312TC at 4000K**



**S9784U606TC at 5000K**

