



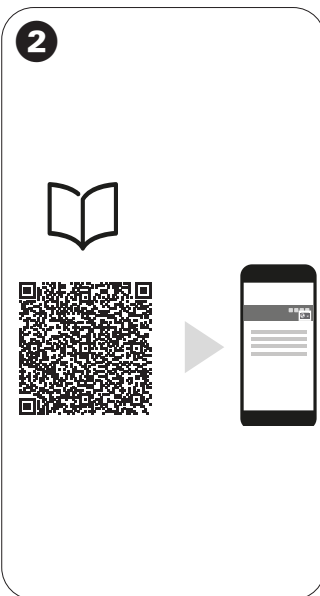

3025CSGZ
PDL395CSGZ

WiZer™

Schneider
Electric

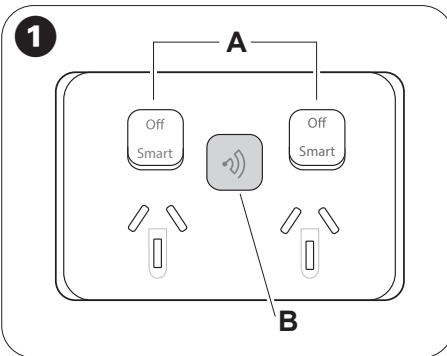

JYT55071

en Iconic Connected Socket Twin 10 A

About this product

The Iconic Connected Socket Twin 10 A operates as a standard socket outlet "out-of-the-box", with no configuration needed. The socket is available with Zigbee connectivity.

The socket can be used as one device in a Wiser Hub network. To do this, the module must be paired to the Wiser Hub via the Wiser Home app.

1 Product details

- A Rocker switch
- B Touch switch

Mounting and Connections

⚠️ ⚠️ DANGER

HAZARD OF ELECTRIC SHOCK, OR ARC FLASH

- It is illegal for persons other than an appropriately licensed electrical contractors or other persons authorised by legislation to work on the fixed wiring of any electrical installation.
- To comply with all safety standards, the device must be used only for the purpose described in this instruction and must be installed in accordance with the wiring rules and regulation in the location where it is installed.
- Lock out and tag the input circuit before accessing the wiring connections.
- There are no user serviceable parts inside the device.

Failure to follow these instructions will result in death or serious injury.

⚠️ CAUTION

EQUIPMENT DAMAGE HAZARD

- Install the device according to instructions in this document.
- Pay attention to the specifications and wiring diagrams related to the installation.
- Do not use the device for any other purpose than specified in this instruction.
- Dropping the device may damage the socket. Check that the device operates after being dropped or if physical damage is shown.

Failure to follow these instructions can result in minor injury or equipment damage.

2 Reading the full device user guide online

Scan the QR code for complete information about the device, including operation, configuration and using the product.

Technical data

Operating voltage	240 V AC 50 Hz
Max. load rating	10 A
LED indicator	Yes
Technology type	Zigbee
Operating frequency:	2.405 GHz to 2.48 GHz
Max. radio-frequency power transmitted:	10 mW at < 50 m
Compatible wall box and bracket ranges	155 155NA 157 157PRM 157/1PRMD 157/1F PDL144M PDL144P PDL140F
Compliance	Safety: AS/NZS 3112 AS/NZS 60669.2.1 EMC: AS/NZS 60669.2.1 RF: AS/NZS 4268
Power failure data retention	Internal date/time retained for at least 6 hrs. Settings preserved indefinitely.
Environmental rating	IP20 (designed for indoor use only)
Operating humidity	5 %–90 % relative humidity, non-condensing
Specifications typical at 25 °C	

Trademarks

- Zigbee® is a registered trademark of the Connectivity Standards Alliance.
- Wiser™ is a trademark and the property of Schneider Electric SE, its subsidiaries and affiliated companies.

Other brands and registered trademarks are the property of their respective owners.

Customer Care

Warranty information

We warrant this product for 2 years. See Warranty links below.

Schneider Electric (Australia) Pty Ltd

33-37 Port Wakefield Road, Gepps Cross SA 5094

Customer Care: 13 73 28

Email: customer care.au@se.com

Warranty: <https://www.clipsal.com/warranty>
www.clipsal.com

Schneider Electric (NZ) Ltd

Level 2, Building 6, 60 Highbrook Drive

Highbrook, Auckland 2013

Customer Care: 0800 652 999

Email: sales@nz.schneider-electric.com

Warranty: <https://www.se.com/nz/en/about-us/legal/terms-and-conditions.jsp>

www.pdl.co.nz