

SCFL10



Cleaning Guide:

It is important to ensure that product is turned off before cleaning.

Do not use any cleaning sprays - only wash down with damp cloth or mild detergent, and lightly hose off. (Do not use an abrasive cloth as it may damage the surface finish).

Do not use harsh chemical cleaners as these may damage the surface coating.







Scorpion LED Floodlights - SCFL10


Product Specification

Part Code	SCFL10
Lumen Output	900lm
Power	10W
Weight	0.280kg
Voltage Rating	240V~ 50Hz
Colour Temp	4000K
IP Rating	IP65
LED Lamp Life (L70)	30,000Hrs
Beam Angle	100°
CRI	>70
Cable Length	900mm
Operating Temp	-10°C to 40°C
Electrical Class	Class I
Product colour	Silver
Fascia colour	Silver with black frame
Installation	Locking hinge bracket
Warranty	Five (5) Years
Dimensions	
L x W x H (mm)	166 x 27 x 86
(refer diagram below)	

Typical Mounting Options

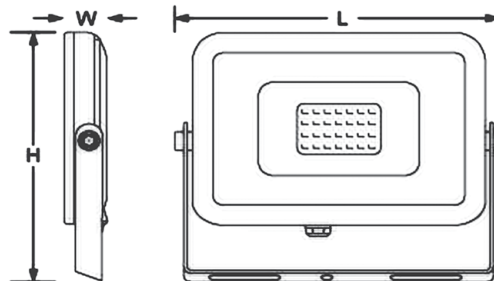

Photometric B Plane Distribution Diagram

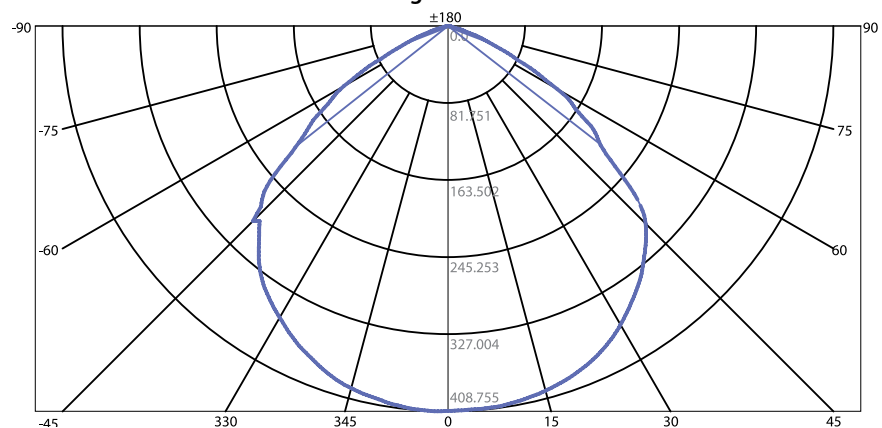

Certification Number:

GMA-503033

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au



SCFL20



Cleaning Guide:





It is important to ensure that product is turned off before cleaning.
Do not use any cleaning sprays - only wash down with damp cloth or mild detergent, and lightly hose off. (Do not use an abrasive cloth as it may damage the surface finish).
Do not use harsh chemical cleaners as these may damage the surface coating.

Scorpion LED Floodlights - SCFL20


Product Specification

Part Code	SCFL20
Lumen Output	1800lm
Power	20W
Weight	0.720kg
Voltage Rating	240V~ 50Hz
Colour Temp	4000K
IP Rating	IP65
LED Lamp Life (L70)	30,000Hrs
Beam Angle	100°
CRI	>70
Cable Length	900mm
Operating Temp	-10°C to 40°C
Electrical Class	Class I
Product colour	Silver
Fascia colour	Silver with black frame
Installation	Locking hinge bracket
Warranty	Five (5) Years
Dimensions	
L x W x H (mm)	166 x 29 x 122
(refer diagram below)	

Typical Mounting Options

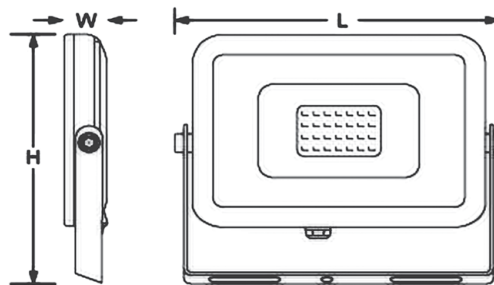

Photometric B Plane Distribution Diagram

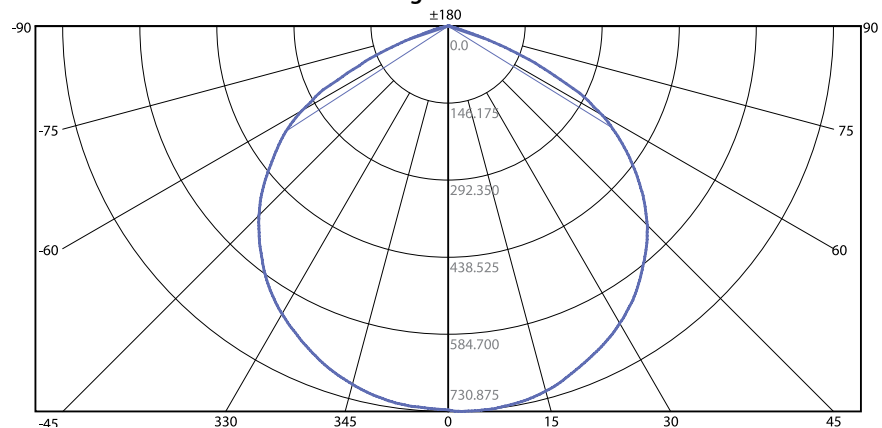

Certification Number:

GMA-503033

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au



Data Specification Sheet
March 2018



SCFL30



Cleaning Guide:





It is important to ensure that product is turned off before cleaning.
Do not use any cleaning sprays - only wash down with damp cloth or mild detergent, and lightly hose off. (Do not use an abrasive cloth as it may damage the surface finish).
Do not use harsh chemical cleaners as these may damage the surface coating.

Scorpion LED Floodlights - SCFL30


Product Specification

Part Code	SCFL30
Lumen Output	2700lm
Power	30W
Weight	0.846kg
Voltage Rating	240V~ 50Hz
Colour Temp	4000K
IP Rating	IP65
LED Lamp Life (L70)	30,000Hrs
Beam Angle	100°
CRI	>70
Cable Length	900mm
Operating Temp	-10°C to 40°C
Electrical Class	Class I
Product colour	Silver
Fascia colour	Silver with black frame
Installation	Locking hinge bracket
Warranty	Five (5) Years
Dimensions	
L x W x H (mm)	195 x 32 x 144
(refer diagram below)	

Typical Mounting Options

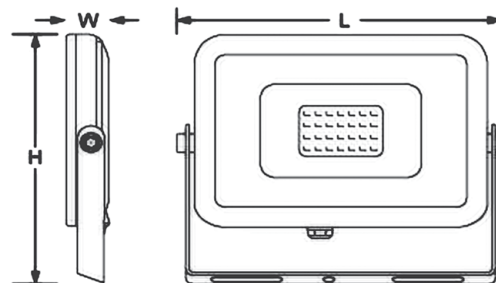

Photometric B Plane Distribution Diagram

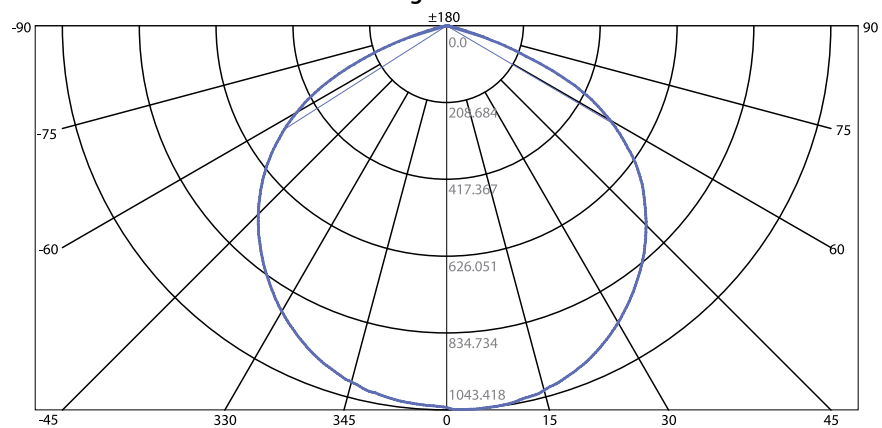

Certification Number:

GMA-503033

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au



SCFL50



Cleaning Guide:



It is important to ensure that product is turned off before cleaning.
Do not use any cleaning sprays - only wash down with damp cloth or mild detergent, and lightly hose off. (Do not use an abrasive cloth as it may damage the surface finish).
Do not use harsh chemical cleaners as these may damage the surface coating.

Scorpion LED Floodlights - SCFL50


Product Specification

Part Code	SCFL50
Lumen Output	4500lm
Power	50W
Weight	1.026kg
Voltage Rating	240V~ 50Hz
Colour Temp	4000K
IP Rating	IP65
LED Lamp Life (L70)	30,000Hrs
Beam Angle	100°
CRI	>70
Cable Length	900mm
Operating Temp	-10°C to 40°C
Electrical Class	Class I
Product colour	Silver
Fascia colour	Silver with black frame
Installation	Locking hinge bracket
Warranty	Five (5) Years
Dimensions L x W x H (mm) (refer diagram below)	210 x 33 x 155

Typical Mounting Options

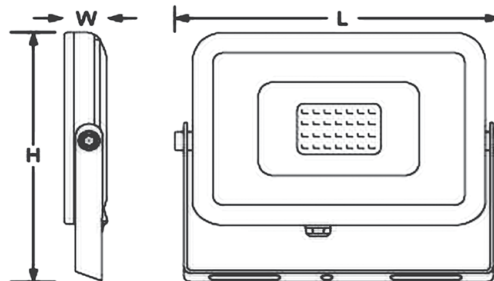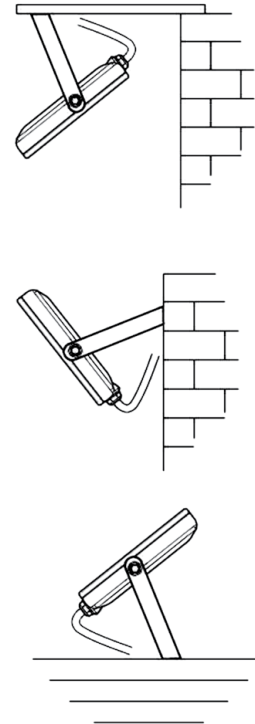

Photometric B Plane Distribution Diagram

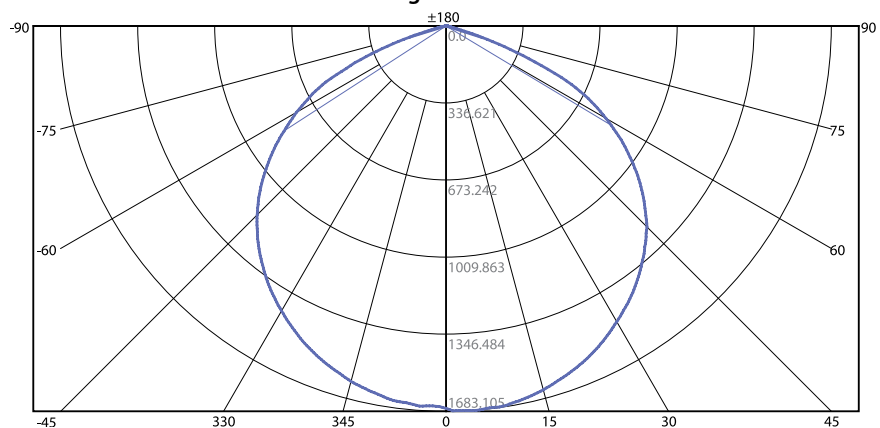

Certification Number:
GMA-503033

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au



Data Specification Sheet
March 2018

