


Description

- Rated temperature: 75°C
- Reference standard: UL444, ANSI/TIA-568-C.2 ISO/IEC 11801 Class E, IEC 61156-5
- Product standard certification:
- Flame test:
- Oxygen free copper conductor
- Colour-coded PE insulation
- LSZH jacket

Product figure

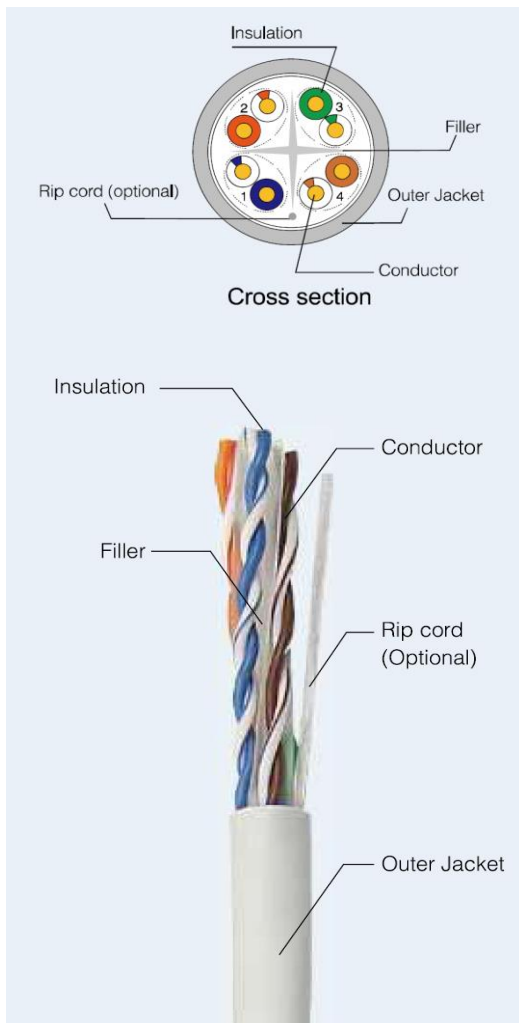

Application

- 100Base-T4
- 100Base-TX
- 100VG-AnyLAN
- 1000Base-T
- 1000Base-TX
- 155Mbps ATM
- 622Mbps ATM
- Meets & exceeds Cat 6 component compliance guaranteeing transmission performance to 250MHz

Physical characteristics

Structure	Construction	U/UTP
	Number of Pairs	4 Pairs
Conductor	AWG	23 AWG
	Conductor material	Solid bare copper
	Conductor dimension	0.560±0.02 mm
Insulation	Insulation material	PE
	Insulation dimension	1.00±0.05mm
	Number colour (Stripe or pure marking)	1.White/Blue & Blue
		2.White/Orange & Orange
3.White/Green& Green	4.White/Brown & Brown	
	Cabling	Twisting lay length
Cabling lay length		≤200mm
Filler	Filler material	PE
Binder	Binder material	N/A
Shield	Individual shield & material	N/A
	Primary overall shield & material	N/A
	Secondary overall shield & material	N/A
	Shield coverage approx	N/A
	Drain wire	N/A
Outer jacket	Jacket material	LSZH
	Jacket thickness nominal	0.50mm
	Overall nominal dimension	6.10 ±0.30 mm
	Jacket color	Per customer request
	Jacket rip cord	None
Mechanical characteristics	Operating temperature range	-20 °C ~ +75 °C
	Bulk cable weight approx	39.0 kg/km
	Max. recommended pulling tension	110 N
	Min. bend radius (install)	4 x O.D.
	Outer jacket tensile strength	≧ 9.0MPa
	Outer jacket elongation	≧ 100%
	Outer jacket aging condition	100 °C x 168 hrs
	After aging,tensile strength	≧ 70% of Unaging
	After aging,elongation	≧ 50% of Unaging
	Cold bend (static)	No Crack (@ -20°C x 4hrs)
Electrical Characteristics	Nom. mutual capacitance	≤5.6 nF/100m (@1kHz)
	Pair to ground capacitance unbalance	≧ 330 pF/100m
	Nominal velocity of propagation	66%
	Max. delay skew	45 ns/100m
	Max. conductor DC resistance	9.5 Ω/100m (@ 20 °C)
	Max. conductor resistance unbalance	5% (@ 20 °C) within a pair
	Min. insulation resistance	5000 MΩ.km
	Max. operating voltage - UL	300 V
	Dielectric strength	2,5 kV d.c. for 2 s
	(Conductor/conductor, conductor/screen)	Or 1,0 kV d.c. for 1 min

Cable Jacket Marking

--	--

Electrical Characteristics

Frequency	Character impedance upper limit	Character impedance lower limit	RL	ATT	NEXT	PS NEXT	ACRF	PS ACRF	PD			
(MHz)	(Ω)	(Ω)	(dB Min)	(dB/100m)	(dB Min)	(dB Min)	(dB Min)	(dB Min)	(dB Min)	(ns/100m Max)		
1	122.2	81.8	20.0	2.0	74.3	72.3	67.8	64.8	570.0			
4	115.2	86.8	23.0	3.7	65.3	63.3	55.8	52.8	552.0			
8	112.6	88.8	24.5	5.3	60.8	58.8	49.7	46.7	546.7			
10	11.9	89.4	25.0	5.9	59.3	57.3	47.8	44.8	545.4			
16	111.9	89.4	25.0	7.5	56.2	54.2	43.7	40.7	543.0			
20	111.9	89.4	25.0	8.4	54.8	52.8	41.8	38.8	542.0			
25	112.9	88.5	24.3	9.5	53.3	51.3	39.8	36.8	541.2			
31.25	114.1	87.7	23.6	10.6	51.9	49.9	37.9	34.9	540.4			
62.5	118.3	84.5	21.5	15.4	47.4	45.4	31.9	28.9	538.6			
100	121.9	82.0	20.1	19.8	44.3	42.3	27.8	24.8	537.6			
150	125.7	79.6	18.9	24.7	41.7	39.7	24.3	21.3	536.9			
200	128.8	77.6	18.0	29.0	39.8	37.8	21.8	18.8	536.5			
250	131.5	76.0	17.3	32.8	38.3	36.3	19.8	16.8	536.3			

Remark : Cable that meet the requirements of the template are not required to be measured for return loss; alternately cables that meet the return loss requirements are not required to be measured for characteristic impedance.

Revision history:		
V1.0	Initial release	2019/6/19

