



COOLUM PLUS S9168TC - 9W

9 watt dimmable, LED TILT downlight, with selectable CCT

Application

Ideal for residential or commercial interior applications

Design Specifications

- 9 watt integral flickerCONTROLLED dimmable driver, complete with flex & plug for easy installation
- High efficiency LED optics, multi-faceted optical system
- Selectable CCT 3000K / 4000K / 5700K, CRI > 90, 40° beam distribution, 30° tilt
- Polyamide trim and body in white or black
- IC - 4 rated, double insulated



Performance

- Dimmable - **YES**
- Dimmer Type - **Trailing edge**




Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9168TC/WH	240	9	750/830/810	3000/4000/5700	40
	S9168TC/BK	240	9	750/830/810	3000/4000/5700	40

Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)
YES	90	WHITE	92	105	105(W) x 71(H)
YES	90	BLACK	92	105	105(W) x 71(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

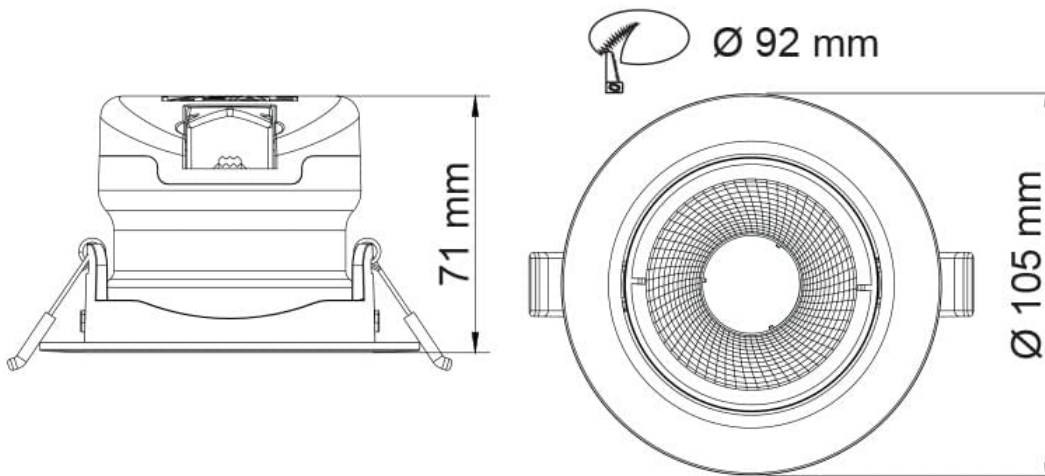

Photometric Data

Unit: cd C0/C180 — C90/C270 —

