

DSRCBS2010CAN

NHP DIN-T Residual Current Device Short Body w/ Overcurrent
6kA 20A 1Pole and N C Curve 10mA Type A



DIN-T
RESIDUAL CURRENT DEVICES



Component type	Earth leakage circuit breaker
Range	DIN-T RCD
Model	N/A
Product status	Existing

NHP's DIN-T range of residual current devices (RCDs) are a high-performance electrical safety solution designed for commercial, industrial and mining applications. These RCDs offer a high level of selectivity, with sensitivities including 10mA, 30mA, 100mA and 300mA, and types starting at Type A for general purpose applications through to Type F and B for more complex loads.

ELECTRICAL

Rated current	20.0 A
Rated voltage	240.0 V
Rated leakage current	10.0 mA
Frequency	50/60 Hz
Rated short-circuit breaking capacity according to AS/NZS 61009	6.0 kA
Voltage type	AC
Trip curve	C
Rated impulse withstand voltage Uimp	6.0 kV
Leakage current type	A
Tripping time	40.0 ms
Service voltage (Min)	195.0 V
Max. operating voltage (Umax)	255.0 V
Rated residual make/break capacity	6000.0 A
Protected neutral pole	No
Number of poles (total)	2.0
Electrical life at Un, In (service cycles)	10000.0 cycles
Type of electric connection	Fork and pin
Isolator application	Yes
Rated insulation voltage Ui	440.0 V
Concurrently switching neutral conductor	Yes

CONSTRUCTION

Mounting method	DIN rail (top hat rail) 35 mm
Degree of protection (IP)	IP20
Number of protected poles	1.0

MECHANICAL

Mechanical life (service cycles)	2000.0 cycles
Shock duration (Max)	5.0 ms
Shock acceleration (Max)	40.0 g

DSRCBS2010CAN

NHP DIN-T Residual Current Device Short Body w/ Overcurrent
6kA 20A 1Pole and N C Curve 10mA Type A



DIN-T

RESIDUAL CURRENT DEVICES

MECHANICAL

Vibration acceleration (Max)	2.0 m/s ²
Vibration frequency, operational (Max)	80.0 Hz
Vibration duration (Max)	30.0 min


DIMENSIONS

Depth	76.0 mm
Height	86.0 mm
Width	18.0 mm
Weight	0.22 kg

ENVIRONMENT

Operating temperature	-5 - 60 °C
-----------------------	------------

DIMENSIONAL DIAGRAM

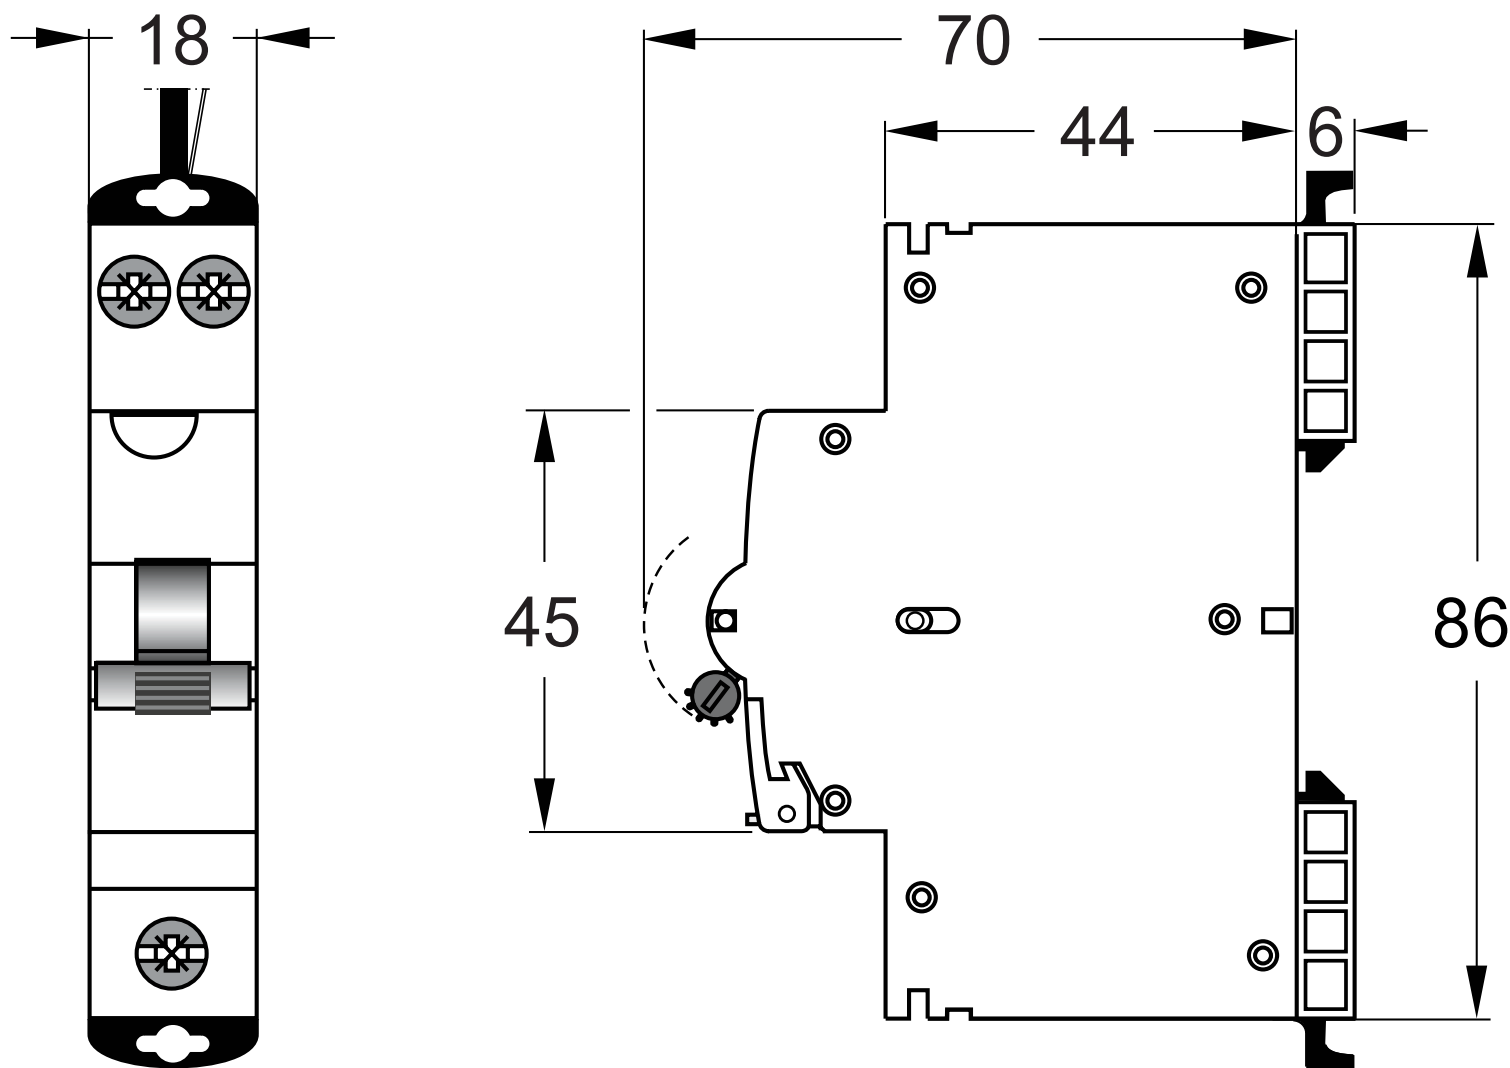

DSRCBS2010CAN

NHP DIN-T Residual Current Device Short Body w/ Overcurrent
6kA 20A 1Pole and N C Curve 10mA Type A



DIN-T

RESIDUAL CURRENT DEVICES

RELATED PRODUCTS

ACCESSORY



Item No: DSRCBSAX

Required: No

Description: NHP DIN-T Accessory Auxiliary
with H and Silver Contact



Item No: DTAUXAL

Required: No

Description: NHP DIN-T Accessory Auxiliary
with Alarm or Auxiliary Function and Silver
Contact



Item No: DSRCBSAXAL

Required: No

Description: NHP DIN-T Accessory Auxiliary
with H and S and Silver Contact



Item No: DTAUXALG

Required: No

Description: NHP DIN-T Accessory Auxiliary
with Selectable Alarm or Auxiliary Function and
Gold Contact