

BALMORAL

Commercial Lighting / Batten

BM1020CTP

Features

4 adjustable power settings
(600mm = 10W-13W-15W-20W)
(1200mm = 20W-25W-30W-40W)
Switchable colour temperature (3000K-4000K-6500K)
Slim body design with opalised polycarbonate diffuser
End Cap Slider for easy diffuser release and installation
Large terminals for easy install
Emergency & Microwave sensor options available
Suitable for surface & suspension mount



Applications

Storerooms
Schools
Residential
Hotels / Motels
Retail
Corridors / Walkways


Options

Emergency (1200mm length only)
Microwave sensor

Standards

Manufactured under ISO 9001:2015 to standards
IEC/AS/NZS 60598.1
IEC/AS/NZS 60598.2.1
IEC/AS/NZS CISPR 15

Mounting Methods

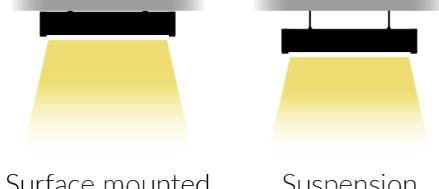

Surface mounted

Suspension





Commercial Lighting / Batten

Specifications

Model	BM1020CTP
Nominal Power (W)	20
Input Voltage (V)	220 - 240
Frequency (Hz)	50 / 60
Luminaire Flux (lm)	2162
Luminaire Efficacy (lm/W)	112
CRI (Ra)	>80
Power Factor	>0.95
SDCM	<6
CCT (K)	3000/4000/6500
Luminaire Rated Life (hr)	50000
Operating Temp. (°C)	-20 to +40
Weight (kg)	0.85

Packaging Details

Model	BM1020CTP
Product Carton Qty per box (pc)	1
Product Carton Dimension (mm)	635 x 76 x 76
Master Carton Qty per box (pc)	4
Master Carton Dimension (mm)	657 x 175 x 178
Master Carton Weight (kg)	4.3



All photometric and electrical data published are of $\pm 10\%$ tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.