

# FLORYN FLE

Exterior Lighting / Floodlight

**FLE100W5K**



DAVIS LIGHTING

## Features

High performance range  
Stylish slim profile body  
Durable die-cast aluminium body  
High-quality powder coating for corrosion protection  
IP66 and IK06 rated  
Instant turn ON  
Maintenance free  
Adjustable mounting bracket




## Applications

Plazas, courtyards & building exteriors  
Factories & warehouses  
Gardens & parks  
Sports & community centers

## Standards

Manufactured under ISO 9001:2015 to standards  
IEC/AS/NZS 60598.1  
IEC/AS/NZS 60598.2.5  
IEC/AS/NZS CISPR 15

## Mounting Methods



Trunnion





### Exterior Lighting / Floodlight

#### Specifications


Model	FLE100W5K
Sorting	11
Nominal Power (W)	100
Input Voltage (V)	220 - 240
Frequency (Hz)	50 / 60
Luminaire Flux (lm)	11,425
Luminaire Efficacy (lm/W)	117
CRI (Ra)	>80
Power Factor	>0.95
SDCM	5
CCT (K)	5000
Beam Angle (°)	110
Surge Protection (Kv)	2
Luminaire Rated Life (hr)	50000
Operating Temp. (°C)	-20 to +45
Weight (kg)	1.38

#### Packaging Details

Model	FLE100W5K
Product Carton Qty per box (pc)	1
Product Carton Dimension (mm)	280 x 210 x 50
Master Carton Qty per box (pc)	6
Master Carton Dimension (mm)	330 x 220 x 295
Master Carton Weight (kg)	10.2



#### Lighting Data

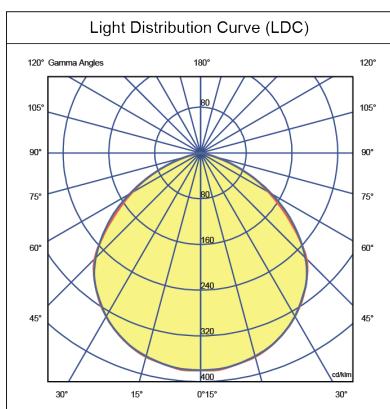

#### Dimensions

