

FLORYN FLE

Exterior Lighting / Floodlight

FLE50W5K



DAVISLIGHTING

Features

- High performance range
- Stylish slim profile body
- Durable die-cast aluminium body
- High-quality powder coating for corrosion protection
- IP66 and IK06 rated
- Instant turn ON
- Maintenance free
- Adjustable mounting bracket

Applications

- Plazas, courtyards & building exteriors
- Factories & warehouses
- Gardens & parks
- Sports & community centers

Standards

- Manufactured under ISO 9001:2015 to standards
- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.5
- IEC/AS/NZS CISPR 15

Mounting Methods



Trunnion





Specifications

Model	FLE50W5K
Nominal Power (W)	50
Input Voltage (V)	220 - 240
Frequency (Hz)	50 / 60
Luminaire Flux (lm)	5945
Luminaire Efficacy (lm/W)	109
CRI (Ra)	>80
Power Factor	>0.95
SDCM	5
CCT (K)	5000
Beam Angle (°)	110
Surge Protection (Kv)	2
Luminaire Rated Life (hr)	50000
Operating Temp. (°C)	-20 to +45
Weight (kg)	0.84


Packaging Details

Model	FLE50W5K
Product Carton Qty per box (pc)	1
Product Carton Dimension (mm)	270 x 160 x 50
Master Carton Qty per box (pc)	12
Master Carton Dimension (mm)	340 x 310 x 285
Master Carton Weight (kg)	12.6


FLORYN FLE

Exterior Lighting / Floodlight

Lighting Data

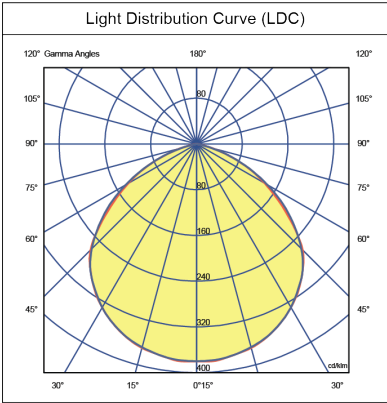

Dimensions

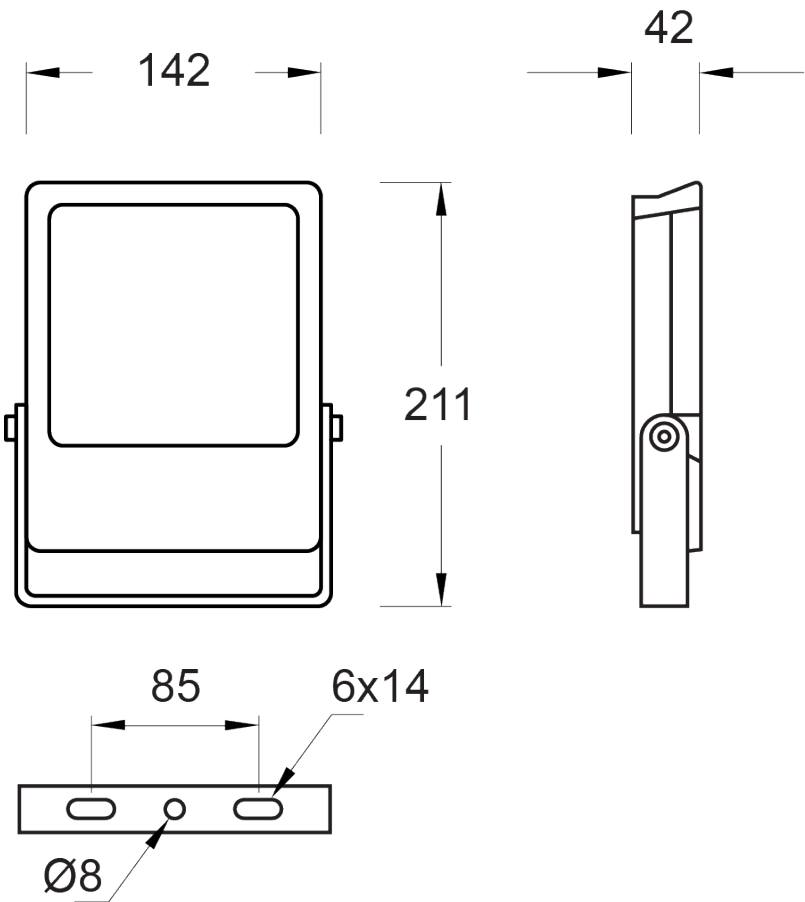

All photometric and electrical data published are of $\pm 10\%$ tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.