

FLORYN FLE

Exterior Lighting / Flood Light

FLE200W5K

Features

- High performance range
- Stylish slim profile body
- Durable die-cast aluminium body
- High-quality powder coating for corrosion protection
- IP65 and IK06 rated
- Instant turn ON
- Maintenance free
- Adjustable mounting bracket


Applications

- Plazas, courtyards & building exteriors
- Factories & warehouses
- Gardens & parks
- Sports & community centers

Standards

- Manufactured under ISO 9001:2015 to standards
- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.5
- IEC/AS/NZS CISPR 15

Mounting Methods



Trunnion



DAVISLIGHTING



FLORYN FLE

Exterior Lighting / Flood Light



Specifications

Model	FLE200W5K
Nominal Power (W)	200
Input Voltage (V)	220 - 240
Frequency (Hz)	50 / 60
Luminaire Flux (lm)	24351
Luminaire Efficacy (lm/W)	136
CRI (Ra)	>80
Power Factor	>0.95
SDCM	5
CCT (K)	5000
Beam Angle (°)	110
Surge Protection (Kv)	4
Luminaire Rated Life (hr)	50000
Operating Temp. (°C)	-20 to +45
Weight (kg)	3.24


Packaging Details

Model	FLE200W5K
Product Carton Qty per box (pc)	1
Product Carton Dimension (mm)	430 x 320 x 55
Master Carton Qty per box (pc)	4
Master Carton Dimension (mm)	330 x 230 x 440
Master Carton Weight (kg)	14.5

FLORYN FLE

Exterior Lighting / Flood Light

Lighting Data

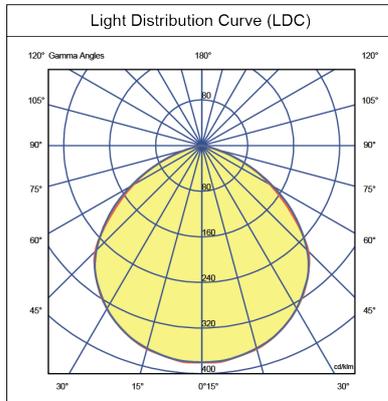

Dimensions

