


LC**STE/LC**SWE SURFACE MOUNT LOAD CENTRES

CONSTRUCTION & CHASSIS:

- High impact ABS material – UV and flame resistant
- Smoked transparent (LC**STE) / Opaque door colour (LC**SWE)
- Current rating: 100 A
- Voltage rating: 415 V
- Insulation Voltage rating: 1000 V
- IP rating: IP40
- MCB/RCD/RCBO type: DIN Profile

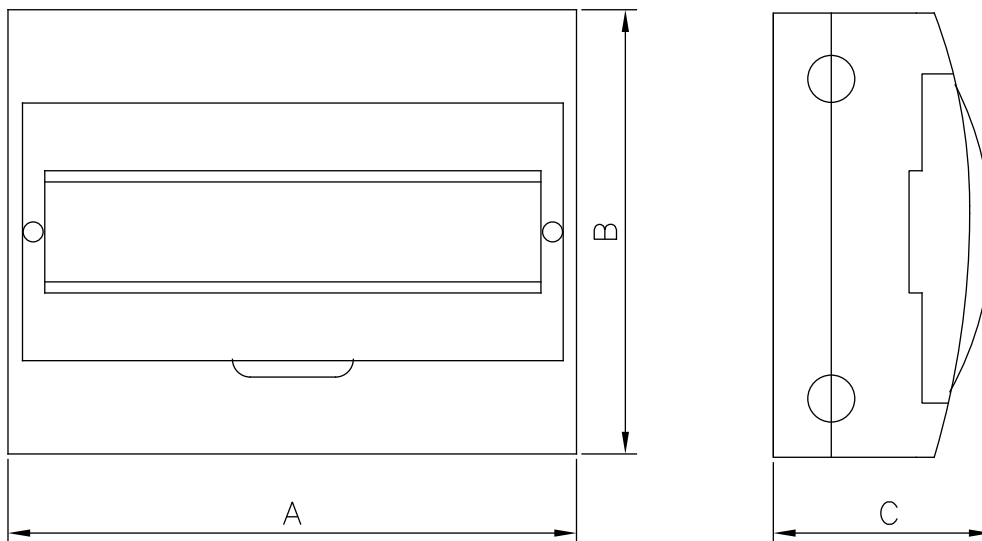

Model No.	Pole	Dimensions (mm)		
		A	B	C
LC04S*E	4	112	201	100
LC06S*E	6	148	201	100
LC08S*E	8	184	201	100
LC012S*E	12	257	201	100
LC018S*E	18	362	220	100
LC024S*E	24	270	325	100
LC036S*E	36	305	470	100