


2 way lever push wire connector Biz'Wing 4 0.2-4 mm² (x 100)

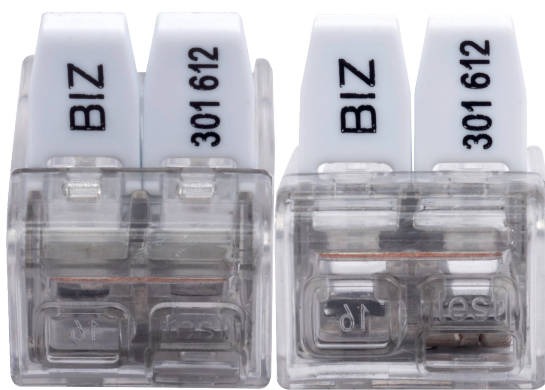

Characteristics

Number of inputs : **2**

Length (mm) : **13**

Width (mm) : **20.64**

Height (mm) : **9.6**

Norms

> EN 60998-1 ; EN 60998-2-2

Benefits

- It is important to strip the wires up to 11 mm.
- Ergonomic, flexible levers ensure ease of use.
- For flexible and rigid wires up to 4 mm².
- Transparent body for better management of connections.

Compliance marks



GENERAL INFORMATION

Technical details

Permissible cross-section for flexible wires: 0.34 to 4 mm².

Permissible cross-section for single and multi-stranded solid wires: 0.2 to 4 mm².

Glow wire resistance: 850 °C.

Maximum ambient operating temperature: 85 °C (T85).

Voltage (V): 450.

Current (A): 32.

Strip off: 11 mm.

Test points.

Material: polycarbonate.

Instructions

1. Strip wires precisely up to 11 mm.
2. Do not twist multi-strand wires.
3. Open the levers.
4. Insert the stripped wires into the bottom of the connector.
5. Close the levers.



LOGISTIC INFORMATION

Packaging



Carton box

Height (cm) : 4.3
Length (cm) : 10
Depth (cm) : 8.6
Net weight (kg) : 0.24
Gross weight (kg) : 0.25



Outer package 1



x 60.00

Carton box

Height (cm) : 28.4
Length (cm) : 45
Depth (cm) : 23
Net weight (kg) : 14.4
Gross weight (kg) : 15.2



Outer package 2



x 1800.00

Pallet

Height (cm) : 120
Length (cm) : 80
Depth (cm) : 130
Net weight (kg) : 456
Gross weight (kg) : 471

