

WYPLASH WPB

Exterior Lighting / Weatherproof



DAVISLIGHTING

WPB2040CTP-E1

Features

- 4 adjustable power settings
- Switchable colour temperature
- Energy efficient IP65 and IK08 rated weatherproof fitting
- Polycarbonate body and opalised diffuser
- Stainless steel clips
- Stainless steel mounting brackets
- Emergency & Microwave sensor options available
- Suitable for surface & suspension mounting



Applications

- Corridors / walk ways
- Factories
- Warehouses
- Car parks
- Security areas

Options

- Emergency (1200mm length only)
- Microwave sensor

Standards

Manufactured under ISO 9001:2015 to standards
IEC/AS/NZS 60598.1
IEC/AS/NZS 60598.2.1
IEC/AS/NZS CISPR 15

Mounting Methods



Surface mounted

Suspension






Specifications

Model	WPB2040CTP-E1
Nominal Power (W)	40
Input Voltage (V)	220-240
Frequency (Hz)	50/60
Luminaire Flux (lm)	4900
Luminaire Efficacy (lm/W)	123
CRI (Ra)	>80
Power Factor	>0.90
SDCM	<6
CCT (K)	3000/4000/6500
Luminaire Rated Life (hr)	50000
Operating Temp. (°C)	-20 to +40
Weight (kg)	1.60

Packaging Details

Model	WPB2040CTP-E1
Product Carton Qty per box (pc)	1
Product Carton Dimension (mm)	1205 x 95 x 86
Master Carton Qty per box (pc)	6
Master Carton Dimension (mm)	1212 x 200 x 265
Master Carton Weight (kg)	11.95

Lighting Data

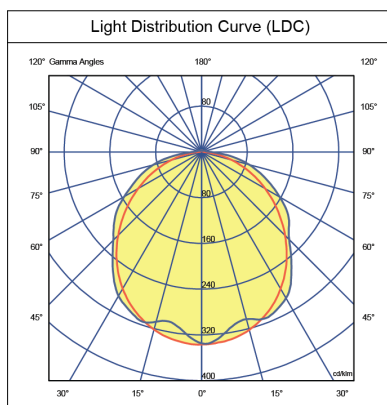

Dimensions

