



UNITREK STR3/9017/15TC - 15W

15 watt architectural track spot - Unitrek three circuit with selectable CCT

Application

Ideal for decorative interior and retail designs

Design Specifications

- Architectural cylindrical profile, 350 degree rotation
- Robust Polyamide body profile, colour matt white or black
- High efficiency LED optics, CRI > 80, selectable CCT 3000/4000/5700K
- Multi-faceted system, standard beam distribution 40 degree
- 15 watt integral dimmable driver

Performance

- Dimmable - **YES**



NEED A HAND
PACKING YOUR
PRODUCT DATA
SHEETS?
GIVE THE SAL
SHOPPING CART
A GO.




Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Body Colour
	STR3/9017/15TC/BK	240	15	1000/1150/1100	3000/4000/5700	BLACK
	STR3/9017/15TC/WH	240	15	1000/1150/1100	3000/4000/5700	WHITE
	STR9017/15RING/BK					BLACK RING INSERT
	STR9017/15RING/WH					WHITE RING INSERT
	STR9017/15R60P					60 DEG BEAM INSERT

CRI	Beam Angle (°)	Dimmable	Dim (mm)
80	40	YES	70(W) x 140(H)
80	40	YES	70(W) x 140(H)
	40		
	40		
	60		

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

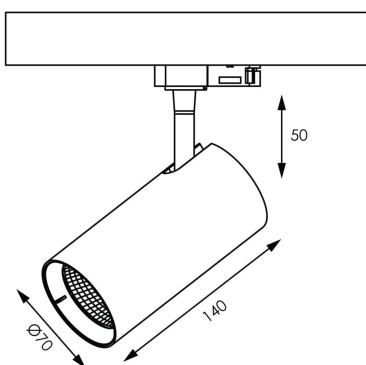

Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

STR3/9017/15W/WW at 3000K

