



UNITREK STR3/9017/30TC/DP - 21/30W

30 watt architectural, three circuit track spot, with selectable power and CCT

Application

Ideal for decorative interior and retail designs

Design Specifications

- Architectural cylindrical shape, 350° horizontal rotation
- Durable Polyamide body profile, colour white or black
- High efficiency LED optics, CRI > 80, selectable CCT 3000/4000/5700K
- Multi-faceted reflector system, standard beam distribution 40°
- Optional black or white baffle available

Performance

- Dimmable - **NO**



Technical Specification


Product	Model No.	Input Voltage (V/AC)	Multiple Wattage	Lumens (lm)	CCT (K)	Body Colour
	STR3/9017/30TC/DP/WH	240	21/30	2100/2400/2200	3000/4000/5700	WHITE
	STR3/9017/30TC/DP/BK	240	21/30	2100/2400/2200	3000/4000/5700	BLACK

CRI	Beam Angle (°)	Dim (mm)
80	40	90(W) x 210(H)
80	40	90(W) x 210(H)

NOTE: Lumens (lm) are shown at maximum power setting

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

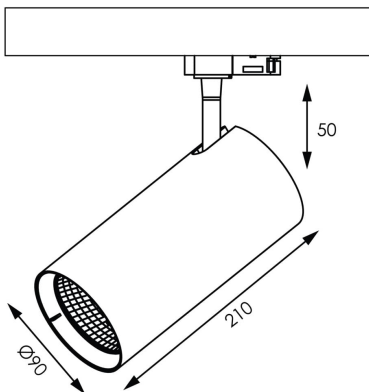

Photometric Data

Unit: cd C0/C180 — C90/C270 —

STR9017/30W/WW at 3000K

