



PORT MKII SHP210 - 100/320W NDL2



IP65 LED area luminaire, IK10 rated

Application

A decorative and versatile exterior commercial solution

Design Specifications

- Durable die-cast aluminium body, powder coated finish in charcoal black
- Adjustable spigot (60mm OD) mounting, 0 - 90°
- High efficiency LED optics, CRI >70, CCT 5000K, optional 3000K/4000K
- Integral constant current non-dimmable LED driver, pre-wired with 1500mm of 3 core rubber flex for easy termination
- Optical distribution - Standard Symmetric (Type V), Optional to order Asymmetric (Type III, IV) and Symmetrical (90°)
- PEB shorting cap provided as standard. Optional ELV PE cell configurations available, PE cell SHP210G2PE

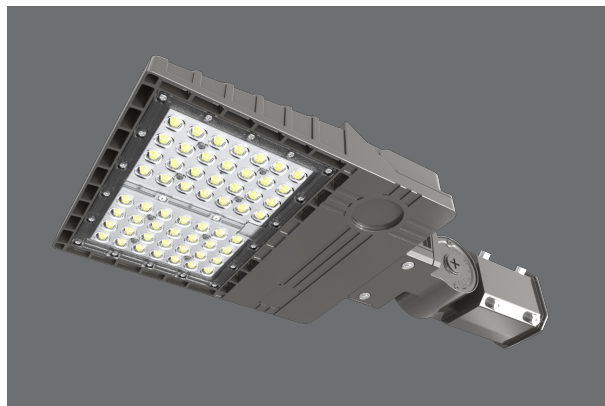

Performance

- Dimmable - **NO**




Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	SHP210/120NDL2	240	100	15000	5000	70
	SHP210/180NDL2	240	150	22500	5000	70
	SHP210/240NDL2	240	200	30000	5000	70
	SHP210/300NDL2	240	320	48000	5000	70
	SHP210UB300/P					
	SHP210G2PE					

Body Colour	Mass (kg)	Length (mm)	Width (mm)	Height (mm)	IPART	VEET
CHARCOAL BLACK	6	587	270	160	N/A	N/A
CHARCOAL BLACK	6.3	587	270	160	N/A	N/A
CHARCOAL BLACK	7	654	320	160	N/A	N/A
CHARCOAL BLACK	8.5	754	320	160	N/A	N/A
CHARCOAL BLACK	1.3				N/A	N/A
ELV PE					N/A	N/A

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

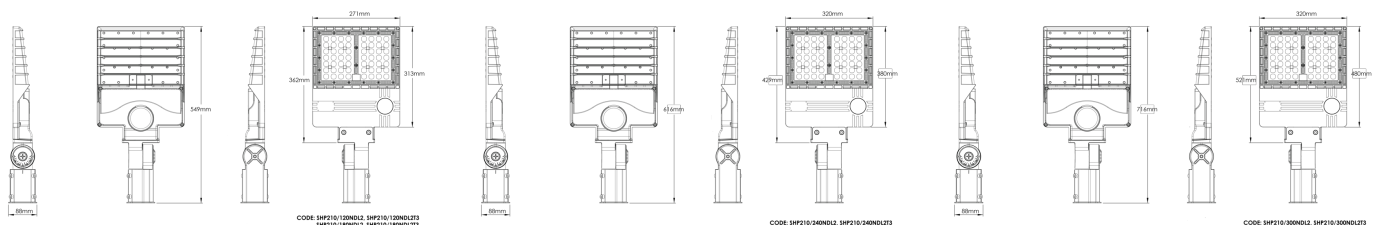

SHP210UB300/P



SHP210UB300/P

