

EMERGENCY DYNAMO LED MANUAL-TEST DOWNLIGHT

2W



CONSTRUCTION:

- White finish Polycarbonate/Aluminium Housing & Trim
- Spring steel ceiling retaining clips
- Aluminium/FR-4 composite PCB

FEATURES:

- Non-maintained emergency lighting is designed to turn on in the event of a power failure
- Complies with AS 2293.3
- D40 classification
- The fitting is prewired with 0.6m flex & plug
- A slim bezel provides a neat flush to the ceiling, attractive aesthetic
- Comes with LiFePO4 battery
- Can be surface mounted with RDYS-01 accessory



FITTING WARRANTY



BATTERY WARRANTY



BATTERY



TESTING



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



CCT




IC RATING



SAFETY CLASS

White	RDY2NMEMT-01
Total Power (W):	2.1
Emergency Light Output (lm):	240
Emergency Lux at 1m (lux):	60
CCT (K):	5700
CRI (Ra):	70
Weight (kg):	0.5
Box Qty:	1

DIMENSIONS (mm)	Diameter	Cut-out	Depth	Proj
RDY2NMEMT-01	85/145	76/125	38	3

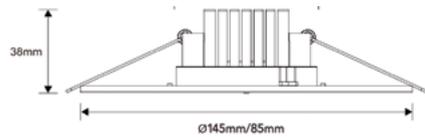

ACCESSORIES

RDYS-01 DYNAMO Surface Mount Box Accessory

DIMENSIONS (mm)	Length	Width	Height
RDYS-01	223	223	65



Scan here for more product information



