


K4004



K4004L / K4004LB

### 1. USE

Axial switch control device for lighting and other control.


### 2. RANGE

Designation	Cat. No.	Related Cover Code
4-way 1P switch 10 AX - 250 V	K4004 K4004L K4004LB (Lightables)	<input type="checkbox"/> KW01 - KW01M2 - KW01A - KW01D KW01F - KW01X - KW01M2A KW01M2D - KW01M2F - KW01M2X
		<input type="checkbox"/> KM01 - KM01M2 - KM01A - KM01D KM01F - KM01X - KM01M2A KM01M2D - KM01M2F - KM01M2X
4 way 1P switch 15AX - 127V	K4004V127L K4004V127LB (Lightables)	<input checked="" type="checkbox"/> KG01 - KG01M2 - KG01A - KG01D KG01F - KG01X - KG01M2A KG01M2D - KG01M2F - KG01M2X

#### Colours code:

- White
- Sand
- Black

### 3. OVERALL DIMENSIONS (mm)

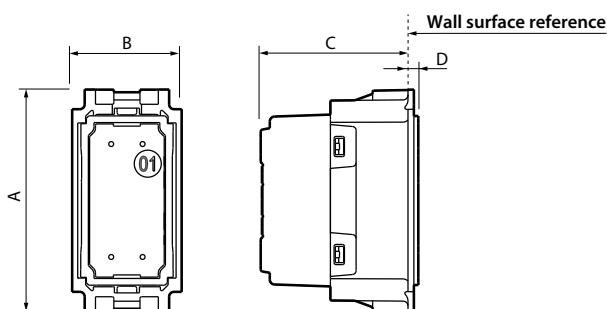

A	B	C	D
45	22	30	2

### 4. CONNECTION

Screw clamps for all devices.  
Stripping length (rigid or flexible cables): 9 mm for screw terminals.

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Protection index

Penetration by solid bodies/liquid: IP20 considering complete installation  
Impact test: IK 04

#### ■ 5.2 Material characteristics

Material: Polycarbonate for mechanism case  
Halogen free.  
UV resistant.  
Self-extinguishing:  
- 850° C / 30 s for insulating parts holding live parts in place.  
- 650° C / 30 s for other parts made of insulating materials.

#### ■ 5.3 Electrical characteristics

Voltage: 250 VAC  
Current: 10AX  
Current: 127V  
Current: 15AX

#### ■ 5.4 Climatic characteristics:

Storage and operating temperatures: - 5° C to + 35° C

### 6. CLEANING

Surface cleaning with a cloth.  
Do not use: acetone, tar remover, trichloroethylene.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

### 7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.  
Refer to e.catalogue.