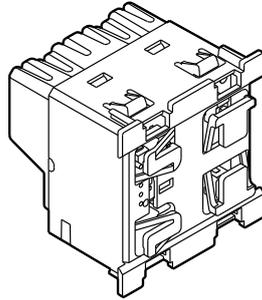


Touch dimmer

1. USE


Touch dimmer from 20 to 600 W.

2. RANGE

Designation	Cat. Nos.	Related Cover code
Touch dimmer output 0 - 10 V with electronic protection - 2 modules	K4410	<input type="checkbox"/> KW19 <input type="checkbox"/> KM19 <input type="checkbox"/> KG19

Colours code:

- White
- Sand
- Black

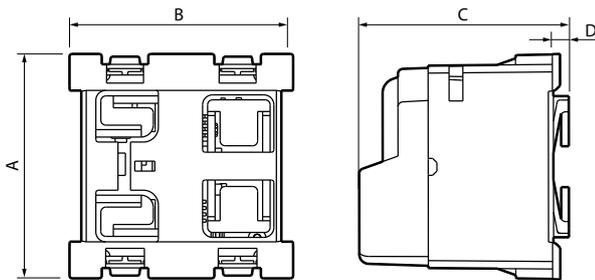2. RANGE


A	B	C	D
45	45	38	3

4. CONNECTION

Screw terminal
 Terminal capacity: 1 x 25 mm²
 Stripping length: 9 mm

5. TECHNICAL CHARACTERISTICS
5.1 Protection index

Penetration by solid bodies/liquid: IP 21
 Impact test: IK 04

5.2 Material characteristics

Satin appearance.
 Material: Polycarbonate for Socket outlet cover.
 Halogen free.
 Self-extinguishing:
 + 850° C / 30 s for insulating parts holding live parts in place.
 + 650° C / 30 s for other parts made of insulating materials.
 UV resistant.

5.3 Electrical characteristics

Voltage: 250 VAC
 Frequency: 50/60 Hz

Reference	Type of loads	Power supply range	Fluorescent lamps with 0 - 10 V ballast
K4410	0 - 10 V	100 - 240 VAC	40 - 600 VA

5.4 Climatic characteristics:

Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.
 Do not use: acetone, tar remover, trichloroethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
 Refer to e.catalogue