

DIN-T 3P+N RCBO


NHP

Easy upgrade from 3P MCB to RCBO

- AS/NZS 61009 
- Compact 3P 54mm width
- 10kA Type A
- 6A – 63A, C Curve
- 30mA, 100mA, 300mA
- Suits Concept Panelboards



DIN-T 3P+N RCBO

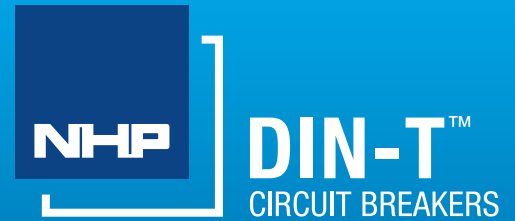


- Compact, same width as 3P MCB 54mm
- Suitable for NHP Concept Panelboards
- Genuine 10kA short circuit protection
- 30mA, 100mA and 300mA options
- Type A, meets new AS/NZS 3000 requirements
- Suits NC and GB chassis
- C Curve overcurrent protection
- Toggle free operation
- Lead Sealable
- Pad lockable (captive and non captive option)

Locking Devices



Cat: DTLD
Non Captive Lock



Cat: DTLLADSRCBT
Captive Lock

Description	30mA Cat. No.	100mA Cat. No.	300mA Cat. No.
06A 3P+N RCBO	DSRCBT0630A	DSRCBT06100A	DSRCBT06300A
10A 3P+N RCBO	DSRCBT1030A	DSRCBT10100A	DSRCBT10300A
16A 3P+N RCBO	DSRCBT1630A	DSRCBT16100A	DSRCBT16300A
20A 3P+N RCBO	DSRCBT2030A	DSRCBT20100A	DSRCBT20300A
25A 3P+N RCBO	DSRCBT2530A	DSRCBT25100A	DSRCBT25300A
32A 3P+N RCBO	DSRCBT3230A	DSRCBT32100A	DSRCBT32300A
40A 3P+N RCBO	DSRCBT4030A	DSRCBT40100A	DSRCBT40300A
50A 3P+N RCBO	DSRCBT5030A	DSRCBT50100A	DSRCBT50300A
63A 3P+N RCBO	DSRCBT6330A	DSRCBT63100A	DSRCBT63300A

Description	Rating
RCD Type	A
Trip Curve	C
Rated Voltage (U_e)	400 / 415 V
Insulation voltage (U_i)	500 V
Impulse withstand voltage (1.2/50) U_{imp}	4 kV
Rated Frequency (Hz)	50 / 60
Rated Short circuit Current (I_{cn})	10 kA
Rated residual breaking capacity ($I_{\Delta m}$)	6 kA
Tightening Torque	2.5 Nm
Terminal size (Top/bottom)	25mm ² / 25mm ² rigid cable
Neutral Pigtail	>900mm
IP Rating, inside/outside	IP4X / IP2X

Compact Dimensions

