


## AWAC-2

DALI Emergency Testing and Monitoring, DIN mount

- Supports up to 64 DALI DT1 emergency devices
- DALI-2 compliant application controller
- Protected against DALI over voltage
- Includes DALI-2 235mA power supply
- Automatic DALI control gear short addressing
- Suitable for switchboard mounting on standard DIN rail
- 10/100 TCP/IP Ethernet compatible with standard IT switches and equipment
- 12 years design life at max. ambient

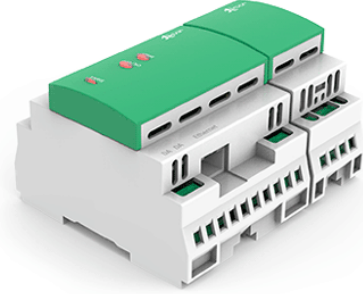

### ORDERING INFORMATION

<b>Order code</b>	16101
<b>Description</b>	DALI-2 Application controller kit with ethernet gateway and 235mA DALI-2 power supply
<b>Item Code</b>	EV-AWAC-2-KIT

### MECHANICAL

<b>Body Material</b>	Polycarbonate
<b>Installation Type</b>	DIN rail (35mm)
<b>IP Rating</b>	IP20

### ELECTRICAL

<b>Electrical Rating</b>	Class II
<b>Input Frequency</b>	50 Hz
<b>Input voltage</b>	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
<b>Working Temp Range</b>	0 to 40 °C

### COMPLIANCE

<b>Standards</b>	AS/NZS 61347.2.11 AS/NZS 61347.1 AS CISPR 15 IEC 62386-101ed2 IEC 62386-103
------------------	---

### WARRANTY

<b>Commercial Use Warranty</b>	3 RTB (Total 3 Years)
--------------------------------	-----------------------