



TITAN S9776TC - 40/80W

40 or 80 watt LED connectable profile, with selectable CCT

Application

Decorative commercial or residential applications, meeting rooms, kitchens or amenity areas

Design Specifications

- Extruded aluminium profile colour white or black, with opal polycarbonate diffuser
- High efficiency LED optics, CRI >80, beam distribution 90°
- Selectable CCT 3000K/4000K/5700K
- Integral constant current non-dimmable LED driver 40 or 80 watt
- Adjustable suspension kit supplied (2 x SSY1512), Accessory option - straight link (S9776IP)
- Surface mounted (allow min. 200 mm clearance at both ends) Loop in loop out wiring available via the PA12 termination block

Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **Trailing edge, DALI / DSI**



Technical Specification


Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	S9776/40TC	240	40	3900/4050/3950	3000/4000/5700	80
	S9776/40TC/BK	240	40	3900/4050/3950	3000/4000/5700	80
	S9776/80TC	240	80	7800/8100/7900	3000/4000/5700	80
	S9776/80TC/BK	240	80	7800/8100/7900	3000/4000/5700	80

Beam Angle (°)	Dimmable	Dim (mm)	Body Colour
90	OPTIONAL	1138(L) x 71(W) x 99(H)	WHITE
90	OPTIONAL	1138(L) x 71(W) x 99(H)	BLACK
90	OPTIONAL	2256(L) x 71(W) x 99(H)	WHITE
90	OPTIONAL	2256(L) x 71(W) x 99(H)	BLACK


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions


S9776 40

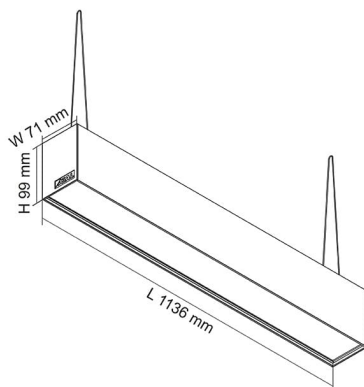

S9776 80

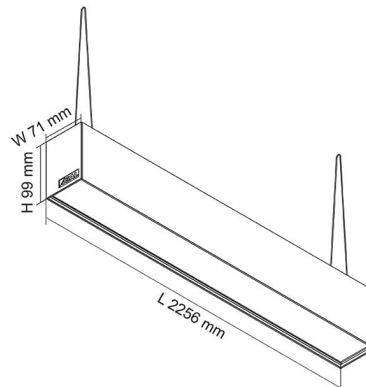

S9776IP

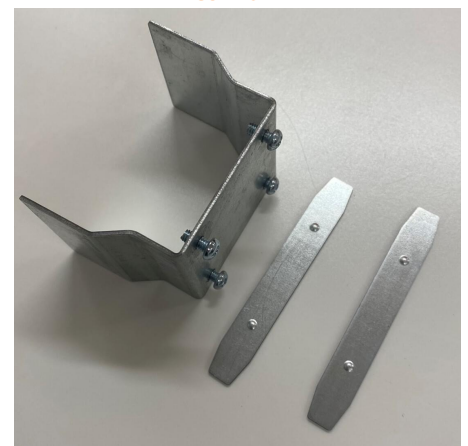

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9776/40CW at 4000K

