



PREMIER S9073TC / DP - 13W/18W

Dimmable 13/18 watt LED downlight with selectable CCT and power, IP64

Application

Ideal for any residential or commercial interior space

Design Specifications

- Premium aluminium body, CA-90 rated
- Stylish white powder coat finish
- Recessed opal polycarbonate diffuser
- High efficiency LED optics CRI>90
- Remote, trailing edge dimmable, dual power LED driver with flickerCONTROL technology and flex and plug
- Double insulated

Performance

- Dimmable - **YES**
- Dimmer Type - **Trailing edge, optional 1-10V, DALI, DSI**



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Multiple Wattage	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9073TC/WH/DP	240	13/18	1500/1800/1600	3000/4000/5700	90
	S9073TC/SL/DP	240	13/18	1500/1800/1600	3000/4000/5700	90

Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)	iPART
YES	90	WHITE	135	165	63(H)	YES
YES	90	SILVER	135	165	165(W) x 63(H)	


VEET
YES

Note: Lumens (lm) shown are displayed at FULL power

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

S9073TC

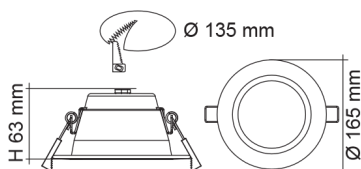

Photometric Data

Photometric Data

Unit: cd C0/C180 — C90/C270 —

