


3 PIN PLUG BASE

ECO Features

- Preference screw positions for fast wiring
- Deep mounting base for rapid fault detection
- Mounting centres: 50mm
- 4 terminals which accommodates 4*4mm cables
- Fire-resistant PC material

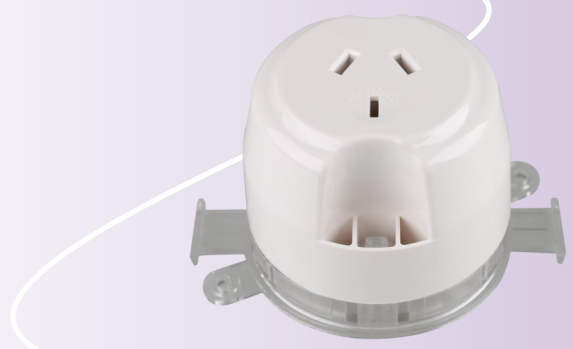

Part No.	Description	Dimensions	BOX QTY	CTN QTY
NLS30461	Single Surface Socket 3 Pin 10A 250V	95*66*58mm	10	100
NLS30107	Double Surface Socket 3 Pin 10A 250V	95*66*74mm	8	80

PREM Features

- Suitable for 70mm cut-out size holes
- Deep base for easy fault inspection and moulded centre-mount indicator
- Tapped screws for easy installation
- 4 terminals which accommodates 6*4mm cables
- High grade fire resistant PC material



Part No.	Description	Dimensions	BOX QTY	CTN QTY
NLS30444	Single Surface Socket 3 Pin 10A 250V	90*65*56mm	10	100

QF Features

- Simple connection and easy installation
- Accommodates 1.0mm² to 2.5mm² cables
- Slim and compact design
- Mounting centres: 50mm
- Fire resistant PC material
- Sheath wiring for connection



Part No.	Description	Dimensions	BOX QTY	CTN QTY
NLS30145	Quick Fit Surface Socket 10A 250V	69*45*45mm	10	200