


Product data sheet

Characteristics

SAU40036183

SAU Chassis, Acti9, 400A, 3Ph, 36 poles,
18mm for iC60 MCB and RCBO, top or bottom
feed

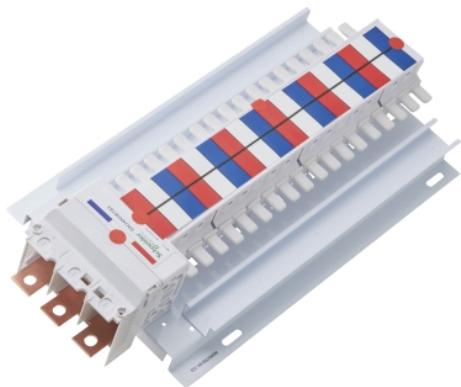

Main

Range	Acti9
Product or component type	Chassis
Device application	Distribution

Complementary

Incomer device	Switch disconnecter - 3P MCCB - 3P
Protection device type	Miniature circuit breaker (MCB) as outgoer Residual current circuit breaker with overcurrent protection (RCBO) as outgoer
Network type	AC
[In] rated current	400 A
Number of ways	1 way (incomer) - 3P 1 way (outgoer) - 1P or 3P
Rated voltage	415 V 50 Hz
Short-circuit withstand	25 kA 0.1 s
[Ui] rated insulation voltage	500 V
[Uimp] rated impulse withstand voltage	6 kV
Number of poles	36
Number of poles	36 x 18 mm
Width	245 mm
Length	518 mm
Depth	95 mm
Net weight	3.24 kg
Busbar pitch	18 mm
Location of connection	Top or bottom

Environment

Standards	AS/NZS 61439
-----------	--------------

Packing Units

Unit Type of Package 1	PCE
Package 1 Length	52 cm
Number of Units in Package 1	1
Package 1 Width	24 cm
Package 1 Height	10.4 cm
Package 1 Weight	2.831 kg

Offer Sustainability

REACH Regulation

 [REACH Declaration](#)

EU RoHS Directive

Not applicable, out of EU RoHS legal scope
