


# DTC202024D

NHP DIN Contactors 20A2 Normally Open Contacts 24V AC DC Coil

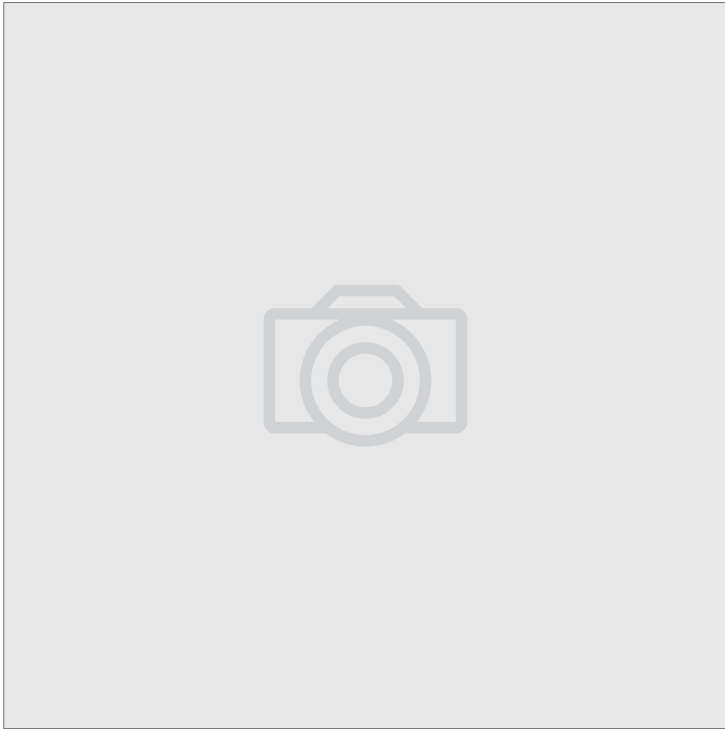

<b>Component type</b>	Power contactor, AC switching
<b>Range</b>	DIN Contactors
<b>Model</b>	N/A
<b>Product status</b>	Existing

NHP's DIN contactors are compact DIN rail mounted contactors, perfect for mounting in panelboards or other enclosures for lighting control. They come in 5 ranges - 16A, 20A, 25A, 40A and 63A - and can have auxiliary contact added for indication.

## ELECTRICAL

Number of normally open contacts as main contact	2.0
Number of normally closed contacts as main contact	0.0
Rated operation current $I_e$ at AC-1, 400 V	20.0 A
Max. rated operation voltage $U_e$ AC	400.0 V
Voltage type for actuating	AC/DC
Control supply voltage $U_s$ at AC 50HZ	24.0 V
Control supply voltage $U_s$ at DC	24.0 V
Number of auxiliary contacts as normally open contact	0.0
Number of auxiliary contacts as normally closed contact	0.0
Control supply voltage $U_s$ at AC 60HZ	24.0 V
Power consumption, AC coil pickup	2.5 VA
Power consumption, AC coil hold-in	2.5 VA
Power consumption, DC coil pickup	2.5 W
Power consumption, DC coil hold-in	2.5 W
Type of electrical connection of main circuit	Screw connection

## CONSTRUCTION

Degree of protection (IP)	IP20
Mounting method	DIN rail mounting

## DIMENSIONS

Height	85.0 mm
Width	17.8 mm
Depth	58.0 mm
Weight	0.14 kg

# DTC202024D

NHP DIN Contactors 20A2 Normally Open Contacts 24V AC DC  
Coil



**DIN-T**  
MINIATURE CIRCUIT BREAKERS

## DIMENSIONAL DIAGRAM

