


Product data sheet

Characteristics

EVP1HSM41

T2S socket-outlet subassembly 1-Ph IEC -
Wallbox spare part

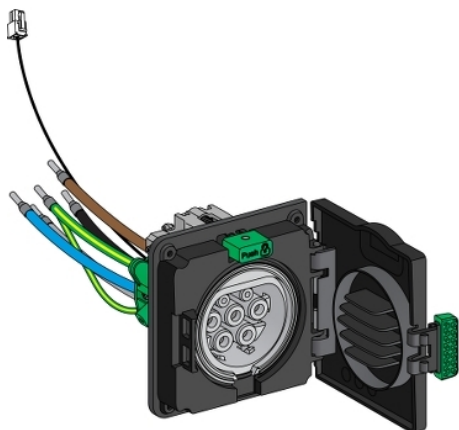

Main

Range	EVlink
Product or component type	Socket-outlet
Socket-outlet type	T2 with shutter
Poles description	1P + N
[Us] rated supply voltage	220...240 V AC 50/60 Hz
Maximum supply current	32 A
Earthing system	Compatible TN Compatible TT Compatible IT with additional isolation transformer on the power supply
Nominal output power	7.4 W 32 A
Range compatibility	EVlink EVlink Wallbox EVH2 charging station

Complementary

Material	Plastic
Product certifications	CE
Height	110 mm
Width	110 mm
Depth	90 mm

Environment

IP degree of protection	IP54 conforming to IEC 60529
IK degree of protection	IK10 conforming to IEC 62262
Ambient air temperature for operation	-30...50 °C
Ambient air temperature for storage	-40...80 °C
Relative humidity	5...95 %

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	15.000 cm
Package 1 Width	15.000 cm
Package 1 Length	40.000 cm
Package 1 Weight	736.000 g

Offer Sustainability

REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes