



PRODUCT DATA

WALL KATT™ Universal Screw Anchor - Light Duty Pan Head



- 1 Screw for installing in a variety of base materials
- No plug required

CONSTRUCT



Applications	Base Materials
<ul style="list-style-type: none"> • Electrical Conduit Saddles • Pipe Saddles • Lighting Fixtures • Signage • Downpipes / Guttering Systems • Brackets 	<ul style="list-style-type: none"> • Plasterboard (Gyprock) • Wood / Timber • Aerated Concrete • Concrete* • Brick / Hollow Concrete Blocks* • Hardwood*

(*Pre-Drilling Required)

Material	HEC Carbon Steel
-----------------	------------------

Finish	Zinc Plated (RoHS Compliant)
---------------	------------------------------


Part	QFind	Size	Length	Drive	Pack
		D (mm)	L (mm)	Phillips	Qty
MWKXZPP65032	MWKXZPP	6.5	32	#2	100

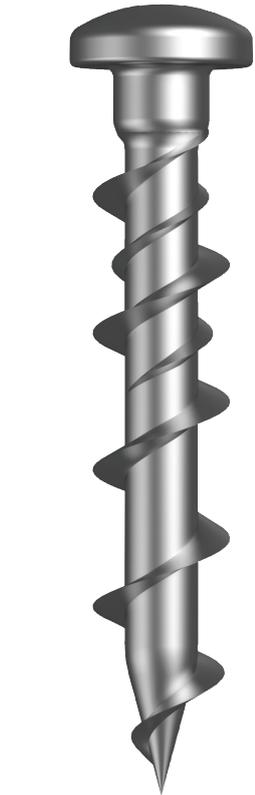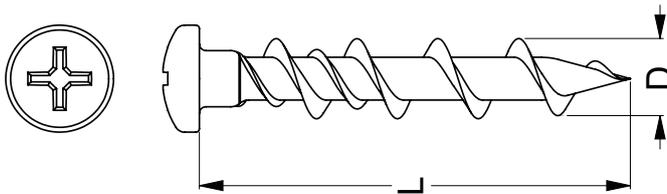

Special Thread Design

- Fast and Easy Fixing
- Prevents Spinning and Stripping

Part	QFind	Size	Length	Drive	Pack
		D (mm)	L (mm)	Square	Qty
MWKXZPQ65032	MWKXZPQ	6.5	32	#2	100

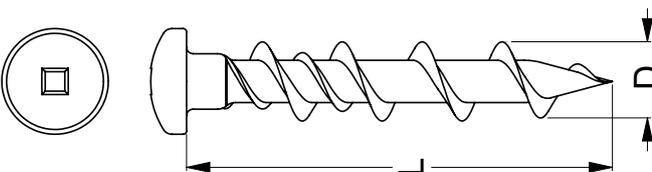

WALLKATT™

Disclaimer: While every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering, its agencies and employees, disclaim any and all liability to any person in respect of anything or the consequences of anything done or omitted to be done in reliance upon the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**



190621IDS



PRODUCT DATA

WALL KATT™ Universal Screw Anchor - Light Duty Pan Head



Phillips



Square

Safe Working Load Capacity Plasterboard (10-12mm)

	Allowable Load Capacity Tension (kN)	Allowable Load Capacity Shear (kN)
Ø6.5	0.03	0.10

Note: These values are indicative only as the quality of plasterboard can vary.

Safe Working Load Capacity Concrete

			Concrete Compressive Strength 32MPa	
Anchor Diameter (mm)	Drill Size (mm)	Embedment Depth (mm)	Allowable Load Capacity Tension (kN)	Allowable Load Capacity Shear (kN)
Ø6.5	5.0	20	0.40	1.20
		25	0.80	1.20

Safe Working Load Capacity Hollow Concrete Block and Brick


			Hollow Concrete Block		Brick	
Anchor Diameter (mm)	Drill Size (mm)	Embedment Depth (mm)	Allowable Load Capacity Tension (kN)	Allowable Load Capacity Shear (kN)	Allowable Load Capacity Tension (kN)	Allowable Load Capacity Shear (kN)
Ø6.5	5.0	20	0.10	0.30	0.25	0.45
		25	0.25	0.70	0.25	0.60

Installation - Install with Non-Impact Driver

Concrete



Plasterboard - No pre-drilling required (Warning: Over-drilling will decrease load capacity.)

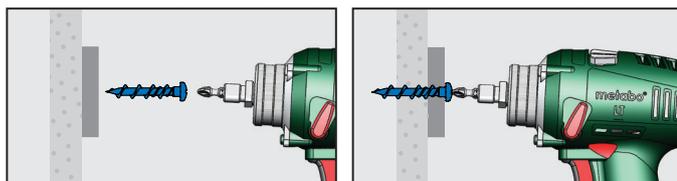

WALLKATT™

Disclaimer: While every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering, its agencies and employees, disclaim any and all liability to any person in respect of anything or the consequences of anything done or omitted to be done in reliance upon the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**



190621IDS