


LED Controllers

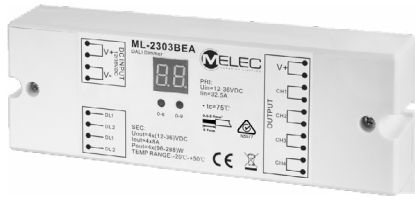

4 Channel DALI Dimmer

ML-2303BEA

Colour Control
Input Voltage
Input Control
Input Channels
Output Power
Suitable Strip
Output Current
Dimensions

RGB, RGB + white or Hybrid strips
12-36VDC
DALI
4
4 x (96-288)W
RGB, CCT & RGBW
1-4A x 4 channels
L 169mm x H 59mm x D 28.6mm

The new 4 channel DALI dimmer unit allows easy DALI address programming either manually or automatically offering RGB, RGB + white or Hybrid strip colour control from the one unit. Digital indicator for address display, with 4 channel capability the DALI addresses can be set from 1 to 4, matching all DALI systems in the market place.



5 Channel Controller



ML-VLC-C5

Colour Control
Input Voltage
Output Current
Output Power
Output Type
Operating Temperature
Dimensions
Warranty

CCT, RGBW, RGB+CCT, DIMMING
12-24VDC
5 x 4A
5 x 48-96W
12-24V constant voltage output
-20°C-+50°C
L 145 x H 46.5 x D 16mm
7 years

The C5 controller offers remote (RF) or Wi-Fi (Tuya App) control and is able to handle RGB, RGB+W, RGB+W+WW, CCT, or single channel dimming.