


# KT9PE111

S&S KT9 Auxiliary Contact with 1NO Contact and 1NC Contact  
Front Mount

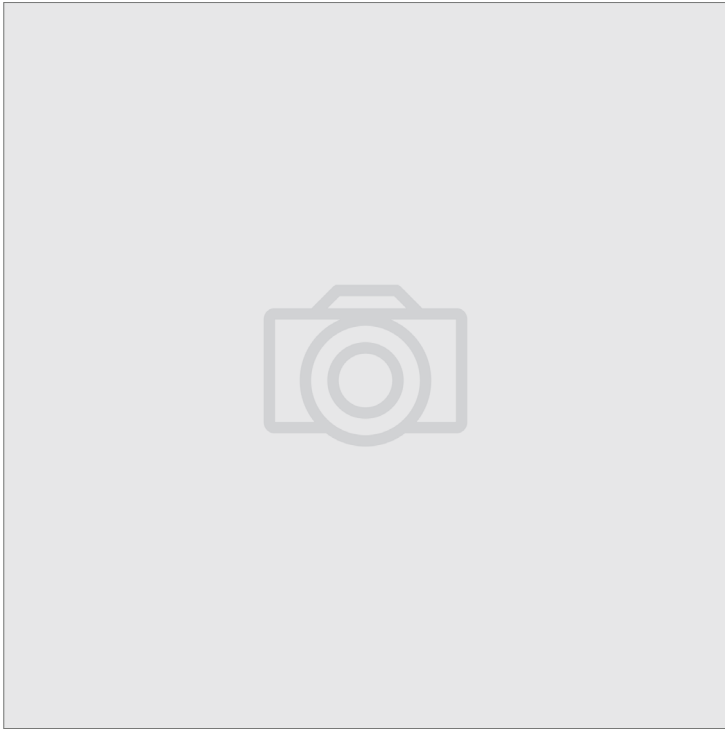

<b>Component type</b>	Auxiliary contact block
<b>Range</b>	KT9
<b>Model</b>	N/A
<b>Product status</b>	Existing

The Sprecher + Schuh KT9 Motor Protection Circuit Breakers (MPCBs) provide magnetic short-circuit and thermal overload protection up to 40A. Offering ratings enabling assembled starters to be applied without additional branch circuit protection. Motor circuit protectors are applied with a separate overload relay for three-component starters and are available in two frame sizes.

## ELECTRICAL

Number of contacts as normally open contact	1.0
Number of contacts as normally closed contact	1.0
Rated insulation voltage $U_i$	250.0 V
Rated operation current $I_e$ at AC-15, 24 V	4.0 A
Rated operation current $I_e$ at AC-15, 120 V	3.0 A
Rated operation current $I_e$ at AC-15, 240 V	1.5 A
Rated operation current $I_e$ at DC-13, 24 V	1.2 A
Rated operation current $I_e$ at DC-13, 125 V	0.22 A
Rated operation current $I_e$ at DC-13, 250 V	0.11 A

## CONSTRUCTION

Mounting method	Top mounting
-----------------	--------------