


KT9PEF1S10N10

S&S KT9 Auxiliary Contact with 1NO Contact Trip Contact 1NO
Contact Front Mount

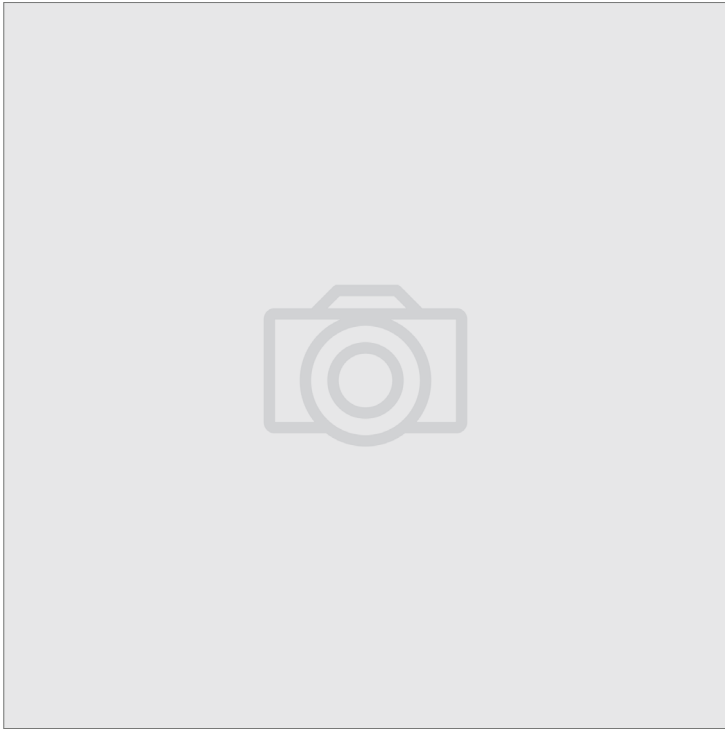

Component type	Auxiliary contact block
Range	KT9
Model	N/A
Product status	New Item

The Sprecher + Schuh KT9 Motor Protection Circuit Breakers (MPCBs) provide magnetic short-circuit and thermal overload protection up to 40A. Offering ratings enabling assembled starters to be applied without additional branch circuit protection. Motor circuit protectors are applied with a separate overload relay for three-component starters and are available in two frame sizes.

ELECTRICAL

Number of contacts as normally open contact	1.0
Number of fault-signal switches	1.0
Rated insulation voltage U_i	250.0 V
Rated operation current I_e at AC-15, 24 V	4.0 A
Rated operation current I_e at AC-15, 120 V	3.0 A
Rated operation current I_e at AC-15, 240 V	1.5 A
Rated operation current I_e at DC-13, 24 V	1.2 A
Rated operation current I_e at DC-13, 125 V	0.22 A
Rated operation current I_e at DC-13, 250 V	0.11 A

CONSTRUCTION

Mounting method	Front fastening
-----------------	-----------------