


KT9PA111

S&S KT9 Auxiliary Contact with 1NO Contact and 1NC Contact
Side Mount

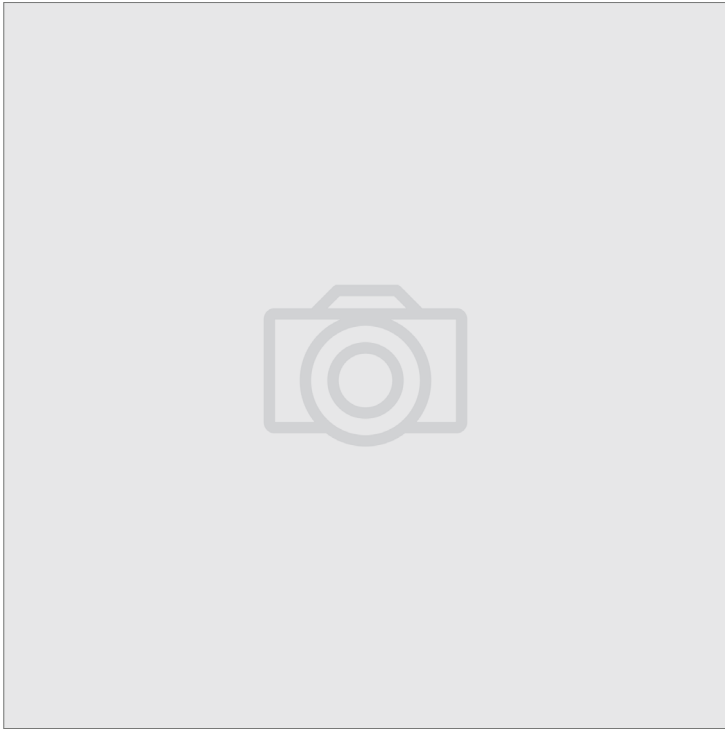

Component type	Auxiliary contact block
Range	KT9
Model	N/A
Product status	Existing

The Sprecher + Schuh KT9 Motor Protection Circuit Breakers (MPCBs) provide magnetic short-circuit and thermal overload protection up to 40A. Offering ratings enabling assembled starters to be applied without additional branch circuit protection. Motor circuit protectors are applied with a separate overload relay for three-component starters and are available in two frame sizes.

ELECTRICAL

Number of contacts as normally open contact	1.0
Number of contacts as normally closed contact	1.0
Rated insulation voltage U_i	690.0 V
Rated operation current I_e at AC-15, 24 V	6.0 A
Rated operation current I_e at AC-15, 120 V	5.0 A
Rated operation current I_e at AC-15, 240 V	3.0 A
Rated operation current I_e at AC-15, 400 V	2.0 A
Rated operation current I_e at DC-13, 24 V	2.0 A
Rated operation current I_e at DC-13, 125 V	0.55 A
Rated operation current I_e at DC-13, 250 V	0.27 A

CONSTRUCTION

Mounting method	Side mounting
-----------------	---------------