

# ROBUS®

## DOWNLIGHTS

### CASSIE TILT CCT3 LED DOWNLIGHT

8W CCT3



## PRODUCT INFORMATION DOCUMENT

### CONSTRUCTION


- White or Black Nylon housing with polycarbonate trim
- Polymethyl methacrylate (PMMA) Diffuser with silver finish reflector
- Steel spring clips
- Pre-wired with 600mm Flex & Plug

### FEATURES


- Switch on the back of the fitting allows selection between 3000K, 4000K, 5700K colour temperature
- Beam angle of 60 degrees with 30 degree tilt
- Very low glare with UGR <22 (black version) or UGR<25 (white version)
- Offers Thermal Insulation rating of IC-4
- High efficacy of 84-107Lm/W
- Dimming Compatible with most TRIAC dimmers (compatibility list available on the website)

--	--	--	--	--	--	--	--	--	--	--

PRODUCT CODE	RCS8CCT3T-01	RCS8CCT3T-04
<b>Comparable to:</b>	50W halogen	50W halogen
<b>Total Power (W):</b>	7.9	7.9
<b>Total Light Output (lm):</b>	840	660
<b>Total Emergency Light Output (lm):</b>	NA	NA
<b>Efficacy (lm/cctW):</b>	107	84
<b>Lux at 1m (lux):</b>	710	630
<b>Emergency Lux at 1m (lux):</b>	NA	NA
<b>CCT (K):</b>	3000/4000/5700	3000/4000/5700
<b>CRI:</b>	80	80
<b>IP:</b>	44	44
<b>Operation Temperature (°C)</b>	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
<b>Inrush Current:</b>	1.4A/31us	1.4A/31us
<b>RG Value:</b>	0	0
<b>Rated Life to L70B50 (Hrs):</b>	>30000	>30000
<b>Dimensions ØxH (mm):</b>	106x84	106x84
<b>Cut Out (mm):</b>	90	90
<b>Weight (kg):</b>	0.21	0.21

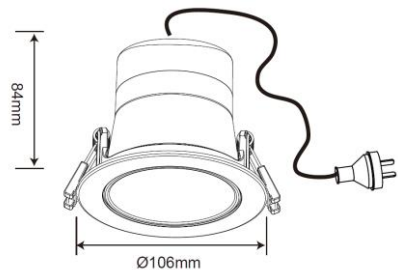

Product is certified to all the relevant standards. Please contact our technical department for market specific compliances.

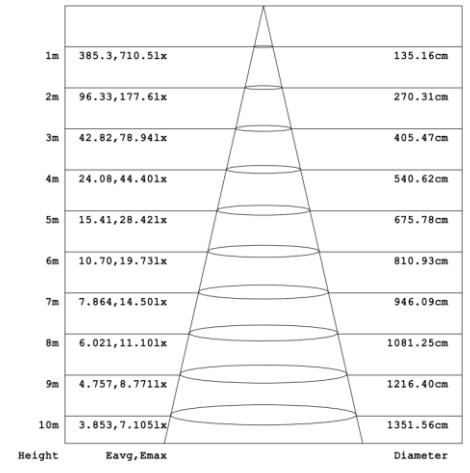

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000  
 UK: TEL: 0800 973 220  
 AUS: TEL: +61 7 3890 5444  
 NZ: TEL: +64 03 668 5285

WEB: ROB.US.COM  
 WEB: ROB.US.COM  
 WEB: ROB.US.COM.AU  
 WEB: ROB.USLED.CO.NZ

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

Diagram for RCS8CCT3-01 in 4000K. Other diagrams available on request