


## Eco Batten Emergency Generation 4

### ECOBAT404ECSLSG4M

- Up to 110lm/W efficiency
- Clean and uniform opal diffuser for even light distribution
- Lumen select (20W to 36W). Colour Select (4000K, 5000K, 6500K)

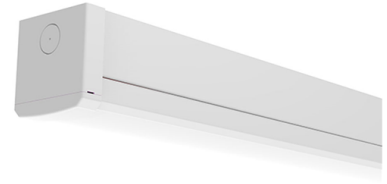

LUMEN SELECT<sup>®</sup> | COLOUR SELECT

#### Performance

System Power	36W, 30W, 25W, 18W
Exit Lumen	4000lm, 3500lm, 3000lm, 2300lm
Efficacy	110lm/W
CCT	4000K, 5000K, 6500K
CRI	80
Operating Temperature	0 to 40
MacAdam Steps	5SDCM
Ingress Protection Rating	IP20
Beam Distribution	Symmetric
Beam Angle	120°
Warranty	5 Years
Lifetime	54,000hrs (L70/B50)


#### Physical

Dimensions	L1164 x W74 x H74 mm
Diffuser	Polycarbonate
Luminaire Colour	White
Weight	1.5kg
Luminaire Material	Steel (Mild)
Driver Location	Integrated
Finish	Powder Coated
Installation	Ceiling Surface Mounted


#### Emergency

Emergency Version	Yes
Testing System	Manual
Battery	LiFePO4
Battery Voltage	6.4V
Battery Capacity	1500mA
Emergency Mode Wattage	3W
Emergency Mode Lumen	348lm
Classification	C0/C180: D50 & C90/C270: D25
Battery Charge	2hr

#### Line Drawings

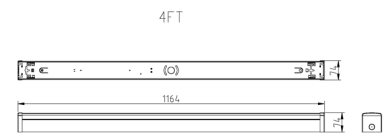

#### Product Images



## Electrical

Dimming	Non - Dimmable
Voltage	240V
Line Voltage Frequency	50Hz/60Hz
Inrush Current	17A
Inrush Current Duration	140µs
Line Current	0.17A
Electrical Rating	Class 1

## Product Images

ECOBAT404ECSLSG4M C0/C180: D50 & C90/C270: D25			
Allowable Luminaire Mounting Height (m)	Luminaire Maximum Spacing for each Plane (M)		
	C0	C90 / C270	C180
2.1	11.5	11.5	11.5
2.4	13.2	13.2	13.2
2.7	14.8	14.8	14.8
3	16.5	15.7	16.5
3.3	18.1	16.1	18.1
3.6	19.8	16.4	19.8
4	21.8	16.8	21.8
4.5	22.5	17.3	22.5
5	23.1	17.6	23.1
6	24.1	18.1	24.1
7	24.9	18.3	24.9
8	25.4	18.2	25.4

