


SMOKE ALARMS

HYBRID SMOKE ALARM ACCESSORY

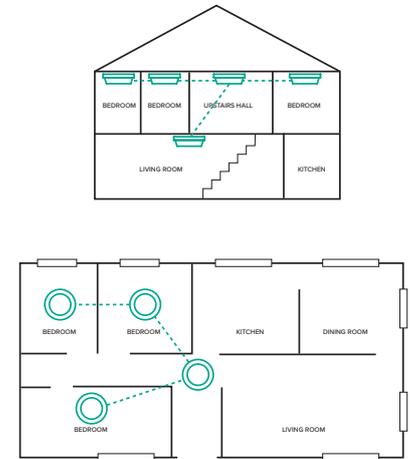

HYBRID SMOKE ALARM OPTIONAL RADIO FREQUENCY (RF) MODULE

The RF Module simply plugs into the designated slot in the base of the Hybrid Smoke Alarm.

Once fitted with the RF module, the Hybrid Smoke Alarm interconnects with up to 40 alarms on the one network wirelessly via an electronic signal.

Interconnected smoke alarms communicate with each other so when one smoke alarm activates all the smoke alarms in the home activate. This gives occupants the best chance of taking action in the event of a fire.

Choosing radio frequency (RF) smoke alarms will make interconnecting alarms easy, without the need for wires.

Emerald's RF enabled smoke alarms can be conveniently controlled by the addition of our RF smoke alarm controller or SafeLink smoke alarm Wi-Fi gateway.

FEATURES

- Easily slots into the base of the Emerald Hybrid Smoke Alarm
- Wirelessly interconnects up to 40 alarms on one network
- Makes interconnection easy
- 10 year warranty

SPECIFICATIONS

MODEL NUMBER	EP-VC-RF-MOD
DIMENSIONS	51 x 32 x 8.6mm
WEIGHT	3.7g
WARRANTY	10 Years
WIRELESS DISTANCE	>20m (100m outside)