

XLED signature series II

XS1020WLED



IK08



120°



IP20



COLOUR
TEMP. ADJUSTABLE



SURFACE
MOUNTED

DESCRIPTION

The XLED Signature Series II batten is a versatile LED diffused luminaire. The robust polycarbonate diffuser and metal body is designed for use in most dirty environments along with general confined areas and industrial applications. Dual wattage & tri-colour makes product selection all more simple.




KEY INFORMATION

| | |
|-----------------|---|
| Model | XS1020WLED |
| Power (W) | 10W/20W |
| Lumens (lm) | 10W/900lm 20W/1800lm |
| Construction | Body – Powder Coated White Steel Sheet Diffuser – Opal high impact polycarbonate Twist lock removable gear tray |
| Dimming Options | Non-dimmable |
| Fitting Colour | White |
| IP Rating (IP) | IP20/IK08 |
| Lifespan (hrs) | 50,000hrs |
| Dimensions | L590mm x W65mm x H65mm |
| Mounting | Surface mounted |
| Control Gear | Integral electronic Non-Dimmable dual power LED driver |

Additional:

- 3 Years replacement warranty on fitting.

PHOTOMETRIC DIAGRAM

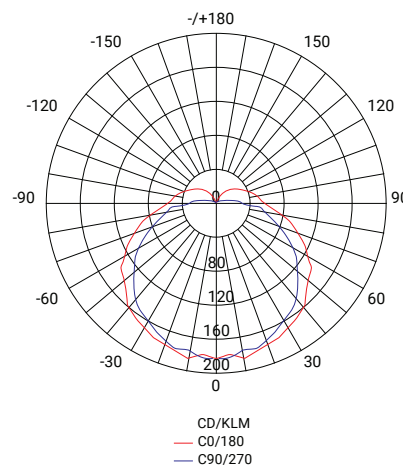

PHOTOMETRIC DATA

| | |
|-----------------|-------------------|
| Efficacy (lm/W) | ≥88 |
| CCT | 3000K/4000K/5700K |
| CRI | >80 |
| Beam Angle (°) | 120° |
| Type LED | SMD Chips |

DIAGRAM(S)

