

## Litelux Colour Select Downlight Gen4

Introducing the new generation Pierlite Litelux Colour Select Downlight Gen4, now with a higher lumen output averaging an outstanding 120lm/W for the DLP6 with integral driver. Retaining all the key features of the Litelux Colour Select - 3000K/4000K/6500K for both integral driver and remote driver options. Both maintain optimal compatibility with our market leading Pierlite Diginet Dimmer range. IC-4 compliant makes its suitable of all interior applications as it can be abutted against building thermal materials, including building insulation and can be covered in normal use.




### COLOUR SELECT

- Select colour temperature from 3000K/4000K/6500K to adapt to any application
- Flush soft diffused lens for uniform distribution
- Integral phase dimmable driver and remote phase dimmable option for low ceiling voids


80	IK02	6SDCM	0 to 40	Phase	50,000hrs (L70/B10) @ 40°C	3 Years	Symmetric	IC-4
CRI	Impact Rating	MacAdam Steps	Operating Temperature	Dimming	Lifetime	Warranty	Beam Distribution	IC Rated

CODE	EXIT LUMEN	EFFICACY	CCT	DIMENSIONS	WEIGHT	INRUSH CURRENT	INRUSH CURRENT DURATION	LINE CURRENT
DLP53/4/65FWG4	870lm	111lm/W	4000K 3000K 6500K	L115 x W115 x H33 mm	0.26kg	1.3A	132µs	3.5A
DLP63/4/65FWG4	850lm	120lm/W	3000K 4000K 6500K	L115 x W115 x H58 mm	0.17kg	1A	17µs	0.31A

### Line Drawings

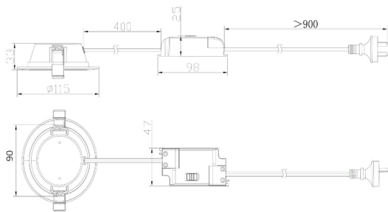

DLP53/4/65FWG4

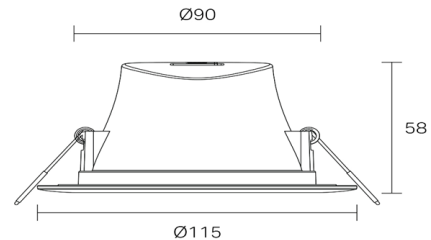

DLP63/4/65FWG4



DLP53/4/65FWG4



DLP53/4/65FWG4



DLP53/4/65FWG4



DLP53/4/65FWG4



DLP53/4/65FWG4



DLP63/4/65FWG4



DLP63/4/65FWG4



DLP63/4/65FWG4

\*Rated LED design life where stated is based upon application of Pierlite's operating and maintenance guidelines; see pierlite.com.au. Actual product life may vary dependent upon frequency of maintenance and product application. Due to continual product improvement, information is subject to change without notification. Pierlite standard Terms and Conditions apply.