


RECESSED EMERGENCY LUMINAIRE



SATLIG2

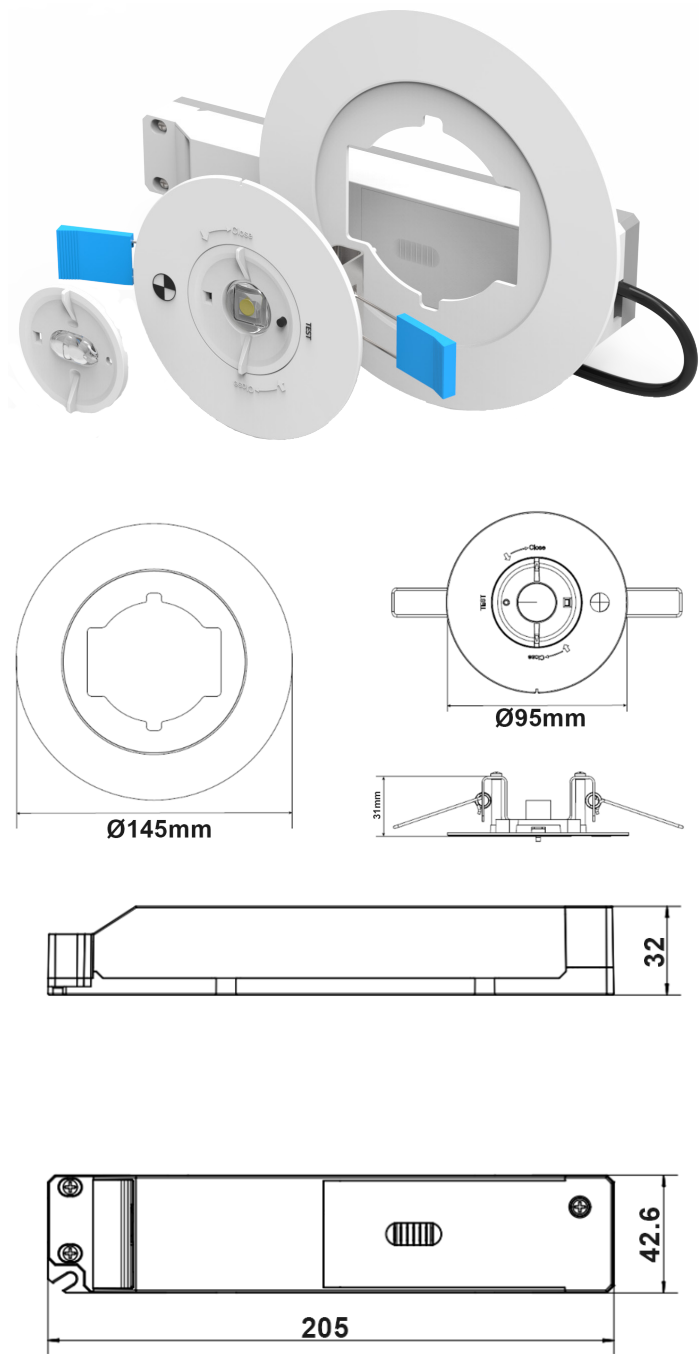

Features:

- Superior photometric classification (D63).
- Supplied with two optical lens options to suit Open Areas (330 Lm) and Corridors (276 Lm).
- LiFePO4 (Lithium Iron Phosphate) battery including integrated battery management system (BMS) to maximise battery life.
- Complete with flex and plug for easy installation
- Versatile two-piece disc with both large (145mm) and small disc (95mm)
- Designed and manufactured in accordance to AS/NZS 2293

Technical Specification

System Performance	
Operating Voltage/ Frequency	230V / 50Hz
Power (Normal)	1.6W
Light Source	LED

Luminaire Construction	
Lamp (Head)	White polycarbonate
Dimensions	Without Adaptor ring - 95mm With Adaptor ring - 145mm
Weight	1.0kg
IP Rating	IP20
Temperature	0°C to +40°C

Emergency Mode - Non-Maintained	
Power (EM)	2.3W
Battery Type	LiFePO4
Battery Specification	3.2V 3.3Ah
Battery Part No.	SATLIG2-BAT
Classification (Open Area Optic)	C0: D63 / C90: D63
Classification (Corridor Area Optic)	C0: D63 / C90: D6.3

Installation	
Mounting	Ceiling (Recessed)

Warranty	
Luminaire	3 Years
Battery	2 Years

