


## Data Sheet | Item Number: 207-1373

Gelbox; inline connection; for cables; with gel; 221 Series; max. 4 mm<sup>2</sup> connectors; without splicing connectors; Size 2; gray

<https://www.wago.com/207-1373>

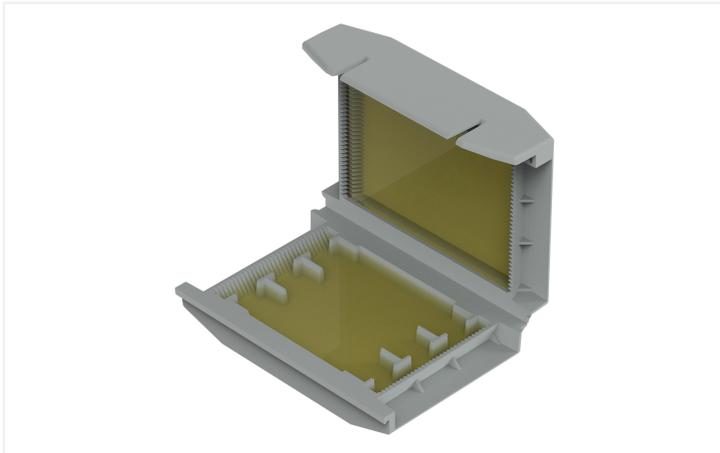

Color: ■ gray



### Application Examples

- Bathroom installation (DIN VDE 0100-701)
- Washing facilities/irrigation systems
- Farms and garden centers (DIN VDE 0100-0705)
- Swimming pool areas (DIN VDE 0100-702)
- Parking lot lighting

- Charging stations and lighting systems in ports

**Note on Packaging Unit (PU) and Subpackaging Unit (SPU):**

If you order a full PU, you will receive our eco-friendly, sustainable cardboard blisters packed in a shelf-ready box.

If you order a quantity smaller than a full PU, you will receive the eco-friendly, sustainable cardboard blisters without a shelf-ready box.

Please refer to the system description for the splicing connectors that can be used.

**Your Benefits:**

- Easy, fast and safe to use
- Can be used immediately and accessed again later
- Silicon-free
- Label-free
- Suitable for indefinite storage
- The complete system, which consists of gelboxes and WAGO splicing connectors, has been VDE-tested and IPX8-certified.

**Connection Data****Connection 1**

Actuation type	Locking system
----------------	----------------

**Physical data**

Width	41.7 mm / 1.614 inches
Height	17.8 mm / 0.669 inches
Depth	56.9 mm / 2.205 inches

**Mechanical data**

Design	Size 2
Mounting type	Flying leads
Protection type	IPX8
Suitable	for 4 mm <sup>2</sup> inline splicing connectors

**Material data**

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	gray
Housing material	Polypropylene
Fire load	0 MJ
Weight	19.8 g

**Environmental requirements**

Ambient temperature (operation)	-55 ... +85 °C
Ambient temperature (storage)	0 ... +40 °C

**Commercial data**

PU (SPU)	28 (4) pcs
Packaging type	Box
Country of origin	DE
GTIN	4066966350067
Customs tariff number	39269097900

**Product Classification**

UNSPSC	39121722
ETIM 9.0	EC001170
ETIM 10.0	EC001170
ECCN	NO US CLASSIFICATION

**Environmental Product Compliance**

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

**Approvals / Certificates**

**Declarations of conformity and manufacturer's declarations**

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

**Downloads**

**Environmental Product Compliance**

<b>Compliance Search</b>	
Environmental Product Compliance 207-1373	<a href="#">↓</a>

**Documentation**

System Description		
System Description 207 Series Gel boxes	pdf 1156.45 KB	<a href="#">↓</a>
System Description 207 Series Gel boxes	pdf 1191.37 KB	<a href="#">↓</a>

Additional Information		
Certificate	pdf 2308.76 KB	<a href="#">↓</a>
DLG Test Report 7438	pdf 1455.46 KB	<a href="#">↓</a>

**CAD/CAE-Data**

<b>CAD data</b>	
2D/3D Models 207-1373	<a href="#">↓</a>

## Installation Notes

### Installation



Open the Gelbox at the side latches.



Place the wired connector in the Gelbox.



Close the Gelbox.



Close latch securely.



Re-accessible:  
Open the Gelbox, remove the gel, open the connector and rewire with new components.

### Application



For low voltage applications > 50 V, use the Gelbox in a junction box.



Connecting a path light.



Lift the flap and pull the cover perforation forward.



Press in the perforation on the sides.



Tear off the cover from the perforation.



As a counter display: Bend the rear flap at the fold, straighten it and fix it in the cardboard cut-out



If the flap is not required, tear off from the perforation.