

ROBUS®

INDUSTRIAL

SONICO PLUS MULTIWATTAGE MULTI CCT LED HIGH BAY, 1-10V DIMMABLE

120/150/200W, IP65






PRODUCT INFORMATION DOCUMENT

FEATURES

- Unique design allows power selection of 120W, 150W and 200W and colour temperature of 3000K, 4000K and 5000K
- LED replacement for 200-400W metal halide highbay fittings
- 1-10V dimmable as standard
- Die cast aluminium housing with polycarbonate lens provides a high impact rating of IK10
- Suitable for switching by Microwave sensor sold as an accessory (RSPMW) and use of remote control (RSPMW-RC)

CONSTRUCTION

- Die-cast aluminium housing
- Polycarbonate lens
- Prewired with 2m 3x1mm² rubber flex and plug



Product Code:	RSNXCCT3DA-04
Comparable to:	200-400W Metal Halide
Total Power (W):	120/150/200
Power Factor:	0.95
Total Light Output (lm):	20770/24970/32010
Total Emergency Light Output (lm):	NA
Efficacy (lm/cctW):	179/176/169
Lux at 1m (lux):	7950/9550/12240
Emergency Lux at 1m (lux):	NA
CCT (K):	3000/4000/5000
CRI:	80
IP:	65
Operation Temperature (°C):	-25 ≤ Ta ≤ +45
Inrush Current:	50A/6us
RG Value:	0
SDCM:	6
Rated Life to L70B50 (Hrs):	50000
Dimensions HxØ:	300x163
Weight (kg):	2.3



RSPMW



RSPMW-RC

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROB.US.COM
WEB: ROB.US.COM
WEB: ROB.US.COM.AU
WEB: ROB.USLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

SONICO PLUS MULTIWATTAGE MULTI CCT LED HIGH BAY, 1-10V DIMMABLE

120/150/200W, IP65

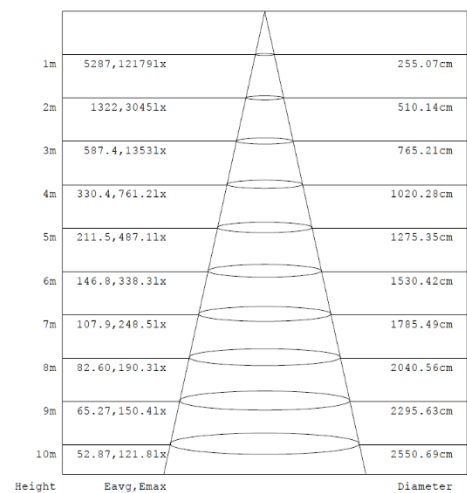


Diagram for RSNXCCT3DA-04 in 200W 4000K. Other diagrams available on request


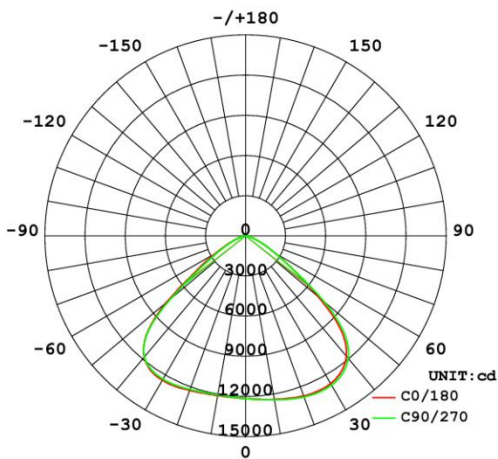


Diagram for RSNXCCT3DA-04 in 200W 4000K. Other diagrams available on request

- RSPMW
- RSPMW-RC
- Plug In Microwave Sensor for SONICO PLUS
- Remote Control For RSPMW

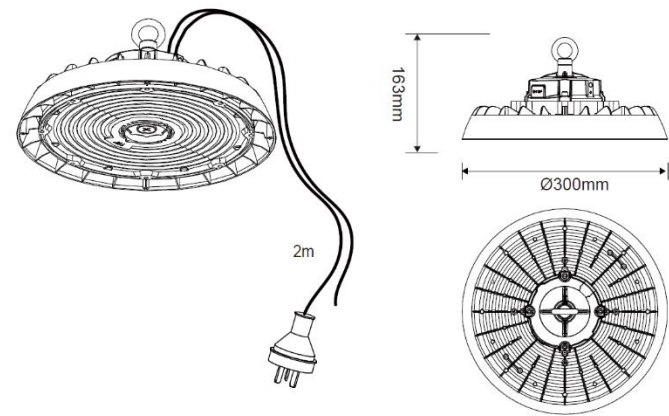

Time Off Delay:	10sec to 60min
Illuminance Switching Range:	10lx to 50lx, disabled
Sensitivity Range (%):	25%, 50%, 75%, 100%
Mounting Height (max):	12
Detection Zone Diameter (max):	12

Cone Illuminance Diagram

Polar Intensity Diagram

Dimension Diagram

Accessories

Sensor Data

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
WEB: ROBUS.COM
WEB: ROBUS.COM.AU
WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA