



MERCURY PRO

Mercury Professional Emergency Exit, 24m

- Single and double sided decals
- Soft-start charger to reduce building load
- Available in low illumination area black model
- IP65 Weatherproof Case available but not included
- Fast emergency switch-over (<0.5s) for high-task areas
- Wall, ceiling, chain and rod mounting (with Rod Mount Kit)
- Long life electronics
- 12 years design life at max. ambient
- High Quality Lithium battery (LiFePO4) and smart charger
- Standalone (SPU)
- Self test (AS2293/ IEC62034
- IEC62386 over IEC62386-104
- Ektor wired monitored system
- Wireless monitoring via Ektor Lynk



ORDERING INFORMATION	
Order code	12563
Description	Ektor Lynk Mercury Emergency LED Exit 24M - Pro W/wireless
Driver Type	Wireless (IEC62386-104) with DT1
Item Code	EV-MERCURY-PRO-24M-LK

MECHANICAL	
Body Material	Polycarbonate
Diffuser Material	Polycarbonate
Fitting Colour	White
Installation Type	Wall or Ceiling
IP Rating	IP20

ELECTRICAL	
Electrical Rating	Class II
Input Frequency	50 Hz
Input voltage	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
Maximum Wattage	4.5 W
Standby Power	3 W

Standby power for non-maintained/switched maintained emergency devices is measured when the light is off and the charger is in standby mode. For maintained emergency devices, standby power is measured when the light is on and the charger is in standby mode. Typically, charging occurs for the first 16 hours after the device is powered or after a battery discharge.

Working Temp Range	0 to 40 °C
--------------------	------------

COLOUR TEMPERATURE	
LED Wattage	1.5 W

DRIVER	
Dimmable	No
Driver Included	Yes
Driver Type	Wireless (IEC62386-104) with DT1
Wiring Type	Re-wireable terminal block (3 pin)

EMERGENCY (EM SUFFIX)	
Replacement Battery Code	01300
Emergency Classification	C0:C12.5, C90:C32
Emergency Control	IEC62386-104 (Wireless DT1) IEC62386-104 ~ Supports wireless test and monitoring over IEC62386-104 using IEC62386-202.
Decal Size	300 x 150 mm
Emergency Duration	90 mins
Emergency Mode	Maintained
Emergency Output Power	1500 mW
Viewing Distance	24 m

COMPLIANCE

EV/MERCURY_03135_2hr

Product Design Life 12 years

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

Standards

- AS/NZS 60598.1
- AS 60598.2.22
- AS/NZS 61347.1
- AS/NZS 61347.2.13
- AS CISPR 15
- AS/NZS 2293.3

WARRANTY

Commercial Use Warranty 8 RTB (Total 8 Years)

DIMENSIONS


Product Height 211 mm

Product Length 326 mm

Product Width 80 mm

LINE DRAWINGS

EV/MERCURY

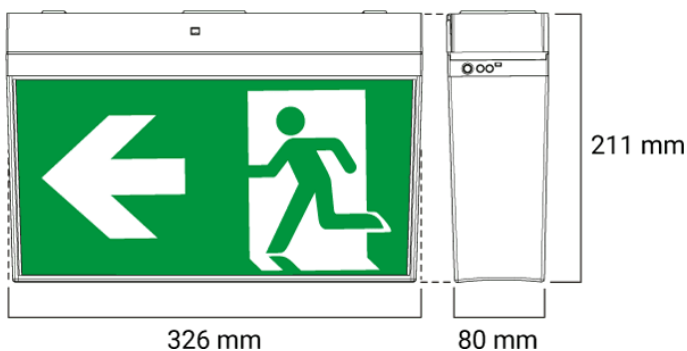

PHOTOMETRICS



ACCESSORIES

ORDER CODE	ITEM CODE	DESCRIPTION
01915	EV-CANTILEVER	Cantilever bracket to suit 3135- 3137- 11258 & 3131
03922	EV-MERCURY-CASE	Weatherproof Case for Mercury
11220	EV-MERCURY-CD-1	Mercury custom decal to suit 11258 and 3135 - 1pc
11216	EV-MERCURY-CD-2	Mercury Clear Decal to suit 11258 and 3135 - 2pk
01995	EV-MERCURY-DP	Mercury III decal pack
03911	EV-MERCURY-WIREGUARD-CEILING	Ceiling mounted only Wire guard
05301	EV-MERCURY-WIREGUARD-WALL	Wall mounted only Wire guard
02004	EV-RODMOUNT-BLK	Rodmount Brackets only for roof and luminaire body - Black (Rod size -25mm)
01990	EV-RODMOUNT-WHT	Rodmount Brackets only for roof and luminaire body - White (Rod size 25mm)