Product Environmental Profile

CONDUIT CLIP








General information

Reference product	CONDUIT CLIP - 180/20
Description of the product	Clips are used to fix cables and conduits in both indoor and outdoor applications.
	The main function of the product is to hold and support cables and conduits in a fixed position up to a diameter of 20mm for a reference life time of 20 years with the following dimensions: 50mm x 19mm x 22mm. These clips can be mounted on different kinds of surfaces, like concrete walls, timbers, and plastic by using nails and screws.

Constituent materials

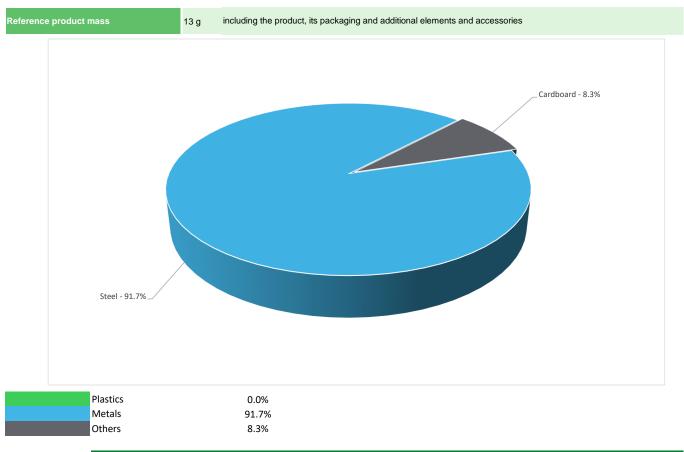

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website https://www.se.com/ww/en/work/support/green-premium/

(Additional environmental information

End Of Life	Recyclability potential:	98%	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	-----	---

Environmental impacts

Reference service life time	20 years								
Product category	Other Cable Management Products								
Installation elements	The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).								
Use scenario	No power required for this product								
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.								
Geographical representativeness	Australia								
	[A1 - A3]	[A5]	[B6]	[C1 - C4]					
Energy model used	Electricity Mix; Production mix; Low voltage; AUS	Electricity Mix; Production mix; Low voltage; AUS	Electricity Mix; Production mix; Low voltage; AUS	Electricity Mix; Production mix; Low voltage; AUS					

Detailed results, including all the impact indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

Mandatory Indicators			CONDUIT CLIP - 180/20						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Loads and Benefits	
impast indicators	Oliit	rotai	[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]	
Contribution to climate change	kg CO2 eq	9.91E-02	6.33E-02	1.70E-03	1.91E-03	0*	3.22E-02	-4.70E-02	
Contribution to climate change-fossil	kg CO2 eq	9.88E-02	6.31E-02	1.70E-03	1.82E-03	0*	3.22E-02	-4.68E-02	
Contribution to climate change-biogenic	kg CO2 eq	2.80E-04	1.95E-04	0*	8.48E-05	0*	0*	-1.75E-04	
Contribution to climate change-land use and land use change	kg CO2 eq	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to ozone depletion	kg CFC-11 eq	7.81E-09	7.60E-09	2.60E-12	1.26E-10	0*	8.58E-11	-6.66E-09	
Contribution to acidification	mol H+ eq	5.15E-04	3.86E-04	1.09E-05	7.57E-06	0*	1.11E-04	-2.73E-04	
Contribution to eutrophication, freshwater	kg (PO4) ³⁻ eq	1.22E-07	1.02E-07	6.37E-10	1.38E-08	0*	5.54E-09	-9.07E-08	
Contribution to eutrophication marine	kg N eq	6.91E-05	4.21E-05	5.13E-06	2.01E-06	0*	1.98E-05	-2.85E-05	
Contribution to eutrophication, terrestrial	mol N eq	7.62E-04	4.74E-04	5.63E-05	1.51E-05	0*	2.17E-04	-3.23E-04	
Contribution to photochemical ozone formation - human health	kg COVNM eq	2.55E-04	1.57E-04	1.42E-05	4.04E-06	0*	7.94E-05	-1.11E-04	
Contribution to resource use, minerals and metals	kg Sb eq	1.57E-05	1.57E-05	0*	0*	0*	0*	-1.39E-05	
Contribution to resource use, fossils	MJ	3.77E+00	1.33E+00	2.37E-02	1.99E-02	0*	2.40E+00	-1.04E+00	
Contribution to water use	m3 eq	3.61E-02	2.28E-02	6.45E-06	8.15E-04	0*	1.24E-02	-1.98E-02	

Inventory flows Indicators			CONDUIT CLIP - 180/20						
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Loads and Benefits	
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]	
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5.83E-03	4.35E-03	3.16E-05	1.42E-03	0*	1.89E-05	3.23E-03	
Contribution to use of renewable primary energy resources used as raw material	MJ	2.08E-02	2.08E-02	0*	0*	0*	0*	-1.89E-02	
Contribution to total use of renewable primary energy resources	MJ	2.67E-02	2.52E-02	3.16E-05	1.42E-03	0*	1.89E-05	-1.56E-02	
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw materia	al ^{MJ}	3.77E+00	1.33E+00	2.37E-02	1.99E-02	0*	2.40E+00	-1.04E+00	
Contribution to use of non renewable primary energy resources used as raw material	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	

Contribution to total use of non-renewable primary energy resources	MJ	3.77E+00	1.33E+00	2.37E-02	1.99E-02	0*	2.40E+00	-1.04E+00
Contribution to use of secondary material	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	8.40E-04	5.32E-04	1.50E-07	1.90E-05	0*	2.88E-04	-4.61E-04
Contribution to hazardous waste disposed	kg	1.25E+00	1.24E+00	0*	0*	0*	1.19E-02	-1.10E+00
Contribution to non hazardous waste disposed	kg	7.87E-02	7.24E-02	5.96E-05	6.21E-03	0*	5.20E-05	-6.33E-02
Contribution to radioactive waste disposed	kg	2.08E-05	1.98E-05	4.24E-08	8.33E-07	0*	7.93E-08	-1.76E-05
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	1.24E-02	0*	0*	1.05E-03	0*	1.14E-02	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version 5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, are available in the LCA report and on demand in a digital format

- Country Customer Care Center - http://www.schneider-electric.com/contact

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2310014_V1	Drafting rules	PEP-PCR-ed4-2021 09 06							
Validity period	dity period 5 years Supplemented by PSR									
Date of issue 12/2023 Information and reference documents www.pep-ecopass										
Independent verification of the de	Independent verification of the declaration and data, in compliance with ISO 14021: 2016									
Internal X	Internal X External									
The PCR review was conducted	The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)									
PEP are compliant with XP C08-	PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019									
The elements of the present PEP cannot be compared with elements from another program.										
Document in compliance with ISO 14021 : 2016 « Environmental labels and declarations. Type II environmental declarations »										

Schneider Electric Industries SAS
Country Customer Care Center
http://www.se.com/contact
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

Published by Schneider Electric

ENVPEP2310014_V1 ©2023 - Schneider Electric – All rights reserved

12/2023