


Specifications

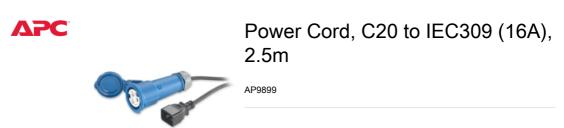

Overview

Presentation	This cable connects an IEC C19 outlet to an IEC 309-16A connector. It can be used as a means to plug in a 16A IEC 309 plug into a Rack PDU with IEC C19 outlets.	
Lead time	Usually in Stock	
Main		
Product or component type	Power cord	
Input Connection Type	IEC 60320 C20	
Cable length	2.5 m	
Physical		
Colour	Black	
Height	9.5 cm	
Width	29.2 cm	
Depth	9.5 cm	
Net weight	0.5 kg	
Mounting preference	No preference	
Mounting mode	Not rack-mountable	
Input		
Max line current	16 A	
Input current limits	16 A	
Output		
Number of power socket outlets	1 IEC 60309 16 A 2P + E	
Conformance		
Product certifications	VDE	
Environmental		
Ambient air temperature for operation	-1040 °C	
Relative humidity	2080 %	
Operating altitude	010000 ft	

storage

Ambient air temperature for

10...30 °C

Storage Relative Humidity	2080 %
Storage altitude	0.00000000015240.000000000 m

Packing Units

•	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	10.2 cm
Package 1 Width	30.5 cm
Package 1 Length	10.2 cm
Package 1 Weight	0.609 kg
Unit Type of Package 2	CAR
Number of Units in Package 2	10
Package 2 Height	25.4 cm
Package 2 Width	32.2 cm
Package 2 Length	53.2 cm
Package 2 Weight	6.12 kg
Unit Type of Package 3	PAL
Number of Units in Package 3	10
Package 3 Height	143.99 cm
Package 3 Width	100 cm
Package 3 Length	120 cm
Package 3 Weight	6.12 kg

Contractual warranty

Warranty

2 years repair or replace

C Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained $>$			
How we assess product sustainability \geq			
earrow Environmental footprint			
Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	158		
Environmental Disclosure	Product Environmental Profile		
Use Better			
Materials and Substances			
EU RoHS Directive	Compliant		
REACh Regulation	REACh Declaration		
Use Again			
$^{\circlearrowright}$ Repack and remanufacture			
Circularity Profile	End of Life Information		
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins		
Take-back	Yes		