

# Product Environmental Profile

## RACK POWER DISTRIBUTION: Switched / Metered

Switched and Metered Power Distribution Units (PDUs) prevent electric surges from affecting electronic equipment and provide remote on/off control/metering of individual outlets.






## General information

<b>Representative product</b>	Power Distribution Units: Switched/Metering -AP7941
<b>Description of the product</b>	The AP7941 PDU provides advanced load monitoring and remote on/off switching control and metering of individual outlets, while distributing power and providing surge protection for multiple power outlets within data centers or related applications.
<b>Description of the range</b>	Switched/Metered Power Distribution Units (PDUs) prevent electric surges from affecting data center electronic equipment and provide remote on/off control/metering of individual outlets.  The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.
<b>Functional unit</b>	Provision of 200V 15A power for up to 24 power loads with surge protection and outlet control for a duration of 10 years.



## Constituent materials

**Reference product mass** 8300 g including the product, its packaging and additional elements and accessories

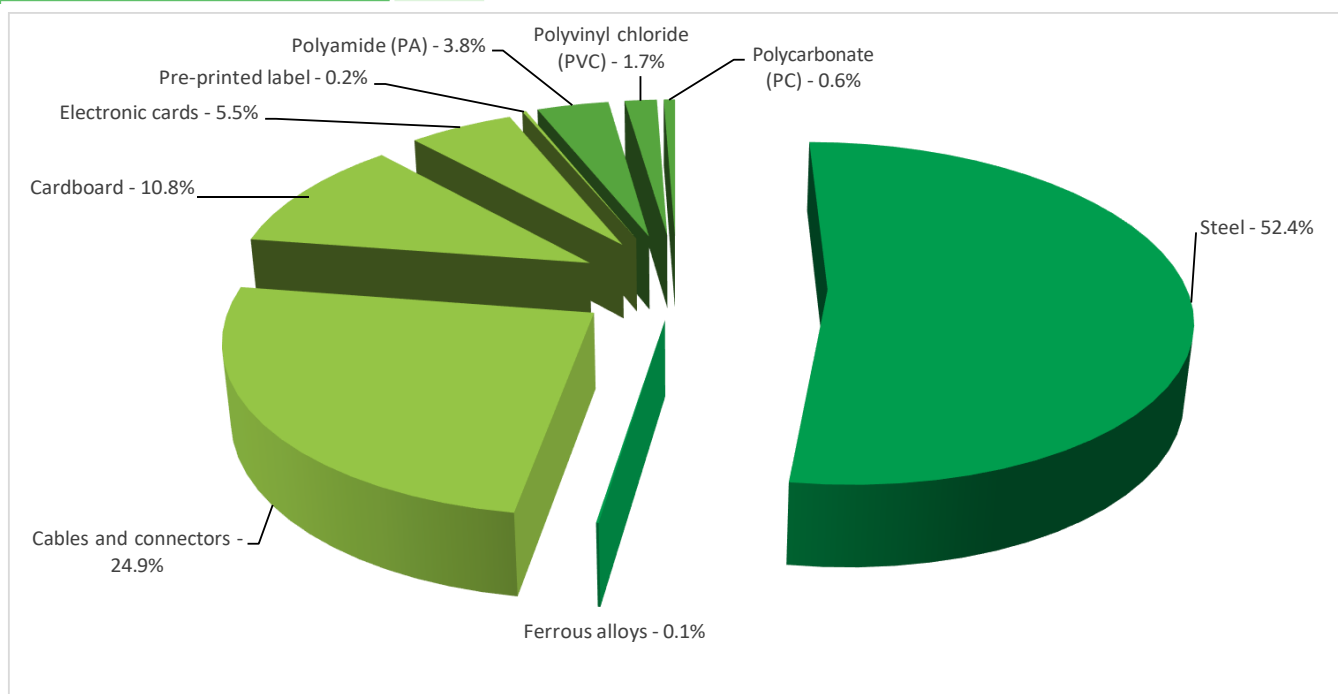

## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorized proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive.

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website  
<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The Power Distribution Units: Switched presents the following relevant environmental aspects

<b>Design</b>	Switched/Metered Rack PDUs provide advanced load monitoring combined with remote on/off switching control of individual outlets for power cycling, delayed power sequencing, and outlet use management. This allows data center operators to actively manage equipment and reduce overall energy consumption within the datacenter (as compared to use of the basic rack PDU). Designed at a Schneider Electric Design Center that utilizes a design process that conforms to the requirements of the IEC 62430 "Environmentally Conscious Design for Electrical and Electronic Products" standard.
<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging are optimized, based on the European Union's packaging directive Packaging weight is 924.6 g, consisting of Cardboard (98%) Paper (2%) Product distribution is optimized by setting up local distribution centers
<b>Installation</b>	AP7941 PDU does not require any special installation materials or operations.
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials.  This product contains external electrical cables (1785 g), printed circuit boards >10cm <sup>2</sup> (462 g), plastics with brominated flame retardants (425 g) and Lithium (coin) batteries (2.5g). that should be separated from the stream of waste so as to optimize end-of-life treatment.  The location of these components and other recommendations are given in the End-of-Life Instruction document which is available on the Schneider-Electric Green Premium website.  <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>  Recyclability potential: <b>71%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).




## Environmental impacts

<b>Reference lifetime</b>	10 years						
<b>Product category</b>	Active products						
<b>Installation elements</b>	Transport and disposal of packaging are accounted for during installation. No special installation components needed.						
<b>Use scenario</b>	Consumed power is 76.23 W 100 % of the time in Active mode, W 0 % of the time in Standby mode, W 0 % of the time in Sleep mode and W 0 % of the time in Off mode.						
<b>Geographical representativeness</b>	Europe						
<b>Technological representativeness</b>	The means of material production, processing and transport modeled are representative of the technologies used in production.						
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>			
	Energy model used: Asia, EU and global	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27			
<b>Compulsory indicators</b>		<b>Power Distribution Units: Switched - AP7941</b>					
<b>Impact indicators</b>	<b>Unit</b>	<b>Total</b>	<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use</b>	<b>End of Life</b>
Contribution to mineral resources depletion	kg Sb eq	2.92E-03	2.63E-03	0*	0*	2.84E-04	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	1.38E+01	1.83E-01	0*	0*	1.36E+01	3.29E-03

Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	8.55E-01	2.71E-02	2.13E-04	2.48E-03	8.24E-01	1.12E-03
Contribution to global warming	kg CO <sub>2</sub> eq	3.32E+03	4.61E+01	0*	1.30E+00	3.27E+03	3.18E+00
Contribution to ozone layer depletion	kg CFC11 eq	2.18E-04	4.62E-06	0*	0*	2.13E-04	1.41E-07
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	7.67E-01	1.60E-02	0*	3.14E-04	7.50E-01	3.53E-04

Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	1.19E+04	0*	0*	0*	1.19E+04	0*
Total Primary Energy	MJ	6.64E+04	1.03E+03	0*	0*	6.53E+04	1.95E+01

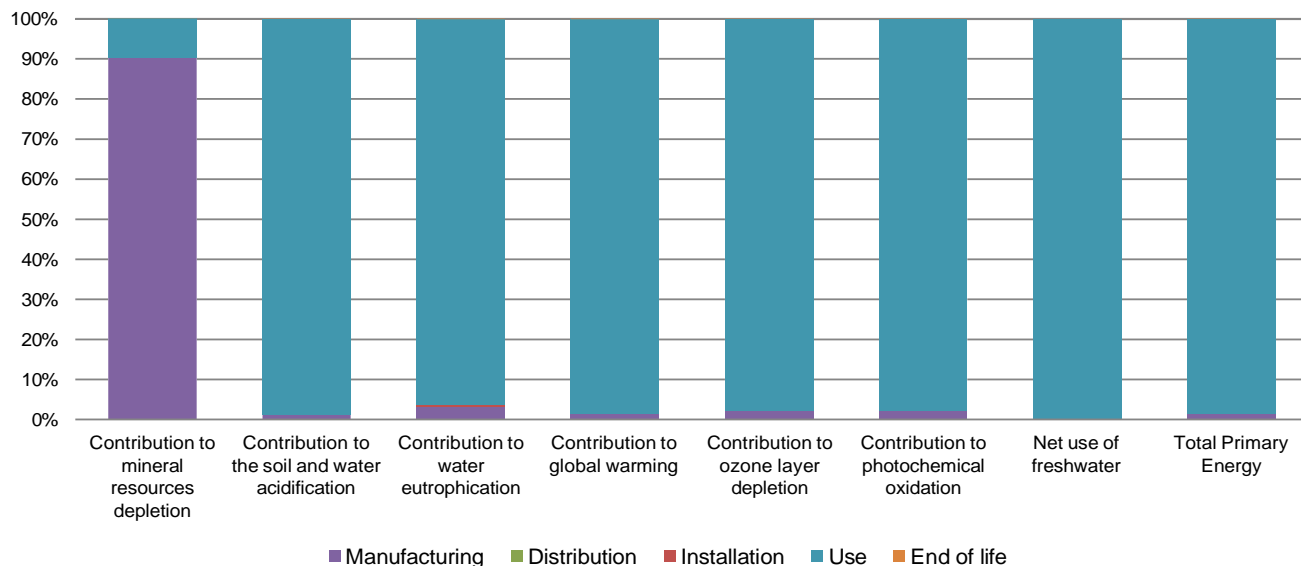

Optional indicators	Power Distribution Units: Switched/Metered - AP7941						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	3.77E+04	5.83E+02	0*	0*	3.71E+04	1.65E+01
Contribution to air pollution	m <sup>3</sup>	1.47E+05	6.38E+03	0*	0*	1.41E+05	1.25E+02
Contribution to water pollution	m <sup>3</sup>	1.43E+05	6.03E+03	3.40E+01	7.44E+01	1.35E+05	2.25E+03
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1.77E+00	1.77E+00	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	8.32E+03	1.13E+01	0*	0*	8.31E+03	0*
Total use of non-renewable primary energy resources	MJ	5.81E+04	1.02E+03	0*	0*	5.70E+04	1.95E+01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	8.30E+03	0*	0*	0*	8.31E+03	0*
Use of renewable primary energy resources used as raw material	MJ	1.88E+01	1.88E+01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	5.80E+04	9.57E+02	0*	0*	5.70E+04	1.95E+01
Use of non renewable primary energy resources used as raw material	MJ	6.06E+01	6.06E+01	0*	0*	0*	0*

Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
<b>Waste categories</b>	<b>Unit</b>	<b>Total</b>	<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use</b>	<b>End of Life</b>
Hazardous waste disposed	kg	2.25E+01	8.59E+00	0*	0*	1.71E+00	1.22E+01
Non hazardous waste disposed	kg	1.22E+04	3.36E+01	0*	0*	1.22E+04	0*
Radioactive waste disposed	kg	8.15E+00	6.71E-03	0*	0*	8.15E+00	0*
<b>Other environmental information</b>	<b>Unit</b>	<b>Total</b>	<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use</b>	<b>End of Life</b>
Materials for recycling	kg	5.95E+00	6.44E-01	0*	0*	0*	5.31E+00
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2.10E-01	0*	0*	0*	0*	2.10E-01
Exported Energy	MJ	7.56E-02	7.56E-02	0*	0*	0*	0*

\* Represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2016-11.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range.

The environmental indicators of other products in this family may be proportional extrapolated based on relationships between an amount of a key parameter of the product as compared to the amount of that key parameter within the reference product. Proportionality rules are based on the following key parameters: Manufacturing phase impacts - mass of the electronic boards (with components). Distribution phase impacts - total mass of product (including packaging). Installation phase impacts - mass of packaging. Use phase impacts - product wattage. End of Life impacts - the product mass (excluding packaging).

<i>Registration number</i>	ENVPEP1612033_V2	<i>Drafting rules</i>	PCR-ed3-EN-2015 04 02
		<i>Supplemented by</i>	PSR-0005-ed2-EN-2016 03 29
		<i>Information and reference documents</i>	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
<i>Date of issue</i>	01/2017	<i>Validity period</i>	5 years
<i>Independent verification of the declaration and data, in compliance with ISO 14025: 2010</i>			
Internal	X	External	
<i>The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)</i>			
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14025: 2010 « Environmental labels and declarations. Type III environmental declarations »</i>			

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Schneider Electric Industries SAS

Customer Care Center  
[www.schneider-electric.com/contact](http://www.schneider-electric.com/contact)  
 35, rue Joseph Monier  
 CS 30323  
 F- 92506 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

ENVPEP1612033\_V1

Published by Schneider Electric

© 2016 - Schneider Electric – All rights reserved

12/2016