

RAZOR PENDANT ADV

Razor Advanced Surface Pendant Emergency Exit, 24m

- Single and double-sided decals
- Pendant exit sign supplied with 3m cable
- Exit sign is powered from pendant cable (no extra wiring)
- 8 years design life at max. ambient
- High Quality Lithium battery (LiFePO4) and smart charger
- Wireless driver (IEC62386-104) with DT1
- 6 years RTB warranty for commercial use
- Fully compliant (AS/NZS 2293)



ORDERING INFORMATION	
Order code	14112
Description	Ektor Lynk Slimblade Advanced Surface Pendant Exit light 24M - Black - W/Wireless
Driver Type	DALI DT1 and DT8 Dimmable
Dimmable ~ Includes DALI-2 Driver with full support for DT1, DT6 and DT8-tc allowing flicker free dimming and colour control with compliant DALI-2 Application controllers. DALI DT8 ~ Includes DALI-2 Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant DALI-2 Application controllers.	
Item Code	EV-RAZOR-SP-ADV-24M-B-LK

MECHANICAL	
IP Rating	IP20
Adjustability	Fixed
Fitting Colour	Black
Body Material	Polycarbonate
Diffuser Material	PMMA
Installation Type	Suspended

ELECTRICAL	
Working Temp Range	0 to 40 °C
Input Frequency	50 Hz
Maximum Wattage	2.9 W
Input voltage	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
Standby Power	2.2 W
Standby power for non-maintained/switched maintained emergency devices is measured when the light is off and the charger is in standby mode. For maintained emergency devices, standby power is measured when the light is on and the charger is in standby mode. Typically, charging occurs for the first 16 hours after the device is powered or after a battery discharge.	

DRIVER	
Driver Type	DALI DT1 and DT8 Dimmable
Dimmable ~ Includes DALI-2 Driver with full support for DT1, DT6 and DT8-tc allowing flicker free dimming and colour control with compliant DALI-2 Application controllers. DALI DT8 ~ Includes DALI-2 Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant DALI-2 Application controllers.	
Driver Included	Yes
Integrated Driver	Yes
Dimmable	No
Wiring Type	Re-wireable terminal block (5 pin)

EMERGENCY (EM SUFFIX)

Emergency Mode	Maintained
Replacement Battery Code	13972
Emergency Duration	90 mins
Viewing Distance	24 m
Decal Size	300 x 150 mm

COMPLIANCE

Product Design Life 8 years

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

WARRANTY


Commercial Use Warranty 6 RTB (Total 6 Years)

DIMENSIONS

Product Height	190 mm
Product Length	315 mm
Product Width	12 mm

LINE DRAWINGS

EV/RAZOR/SP/ADV/24M/LK

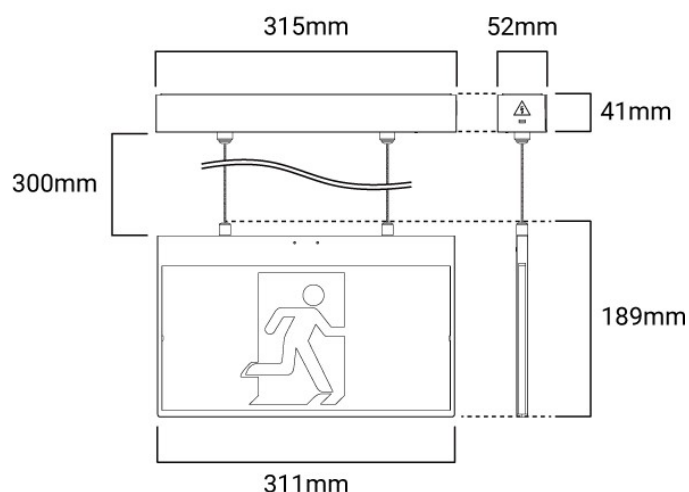

ACCESSORIES

Order code	15196
Description	Wall Bracket to suit EV-RAZOR-SM-CORE - White
Item Code	EV-RAZOR-SM-CORE-WB