



Component type	Miniature circuit breaker (MCB)	
Range	MOD6+ Miniature Circuit Breakers	
Model	N/A	
Product status	New Item	

NHP's MOD6+ range of miniature circuit breakers (MCB) offers cost effective solutions while providing core electrical protection, designed to detect and trip on overload and short circuit currents. These MCBs are available with a 6kA short circuit rating, with current ratings from 6-63A in 1P, 2P or 3P in C trip curve and 80-125A in 1P & 3P in C trip curve.

	Rated current	32 A
ELECTRICAL	Number of poles (total)	1
	Trip curve	С
	Rated voltage	240 V
	Frequency	50-60 Hz
	Voltage type	AC
	Service voltage Ub, AC	12 V
	Rated short-circuit breaking capacity Icn according to AS/NZS 60898 at 230 VAC	6 kA
	Rated short-circuit breaking capacity Icn according to AS/NZS 60898 at 400 VAC	6 kA
	Max. rated operation voltage Ue	440 V
	Rated insulation voltage Ui	440 V
	Rated impulse withstand voltage Uimp	4 kV
CONSTRUCTION MECHANICAL	Additional equipment possible	No
	Number of protected poles	1
	Degree of protection (IP)	IP40
	Connectable conductor cross section solid- core	0.75-25 mm ²
	Connectable conductor cross section multi- wired	0.75-16 mm ²
DIMENSIONS	Height	85 mm
	Width	17.5 mm
	Depth	75.8 mm
	Width in number of modular spacings	1
	Weight	0.12 kg
ENVIRONMENT	Pollution degree	3


MD6M132

NHP MOD6+ Miniature Circuit Breaker MCB 6kA 1 Pole 32A C Curve



ENVIRONMENT	Rated surrounding temperature without derating	30 °C
	Ambient temperature during operating	-2570 °C

CIRCUIT DIAGRAM

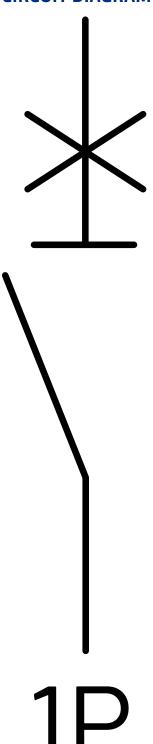

MD6M132

NHP MOD6+ Miniature Circuit Breaker MCB 6kA 1 Pole 32A C Curve



DIMENSIONAL DIAGRAM

