

# PURO G4


**PURO18W-350R**  
SAP CODE: 2002374

The Puro G4 LED oyster light is designed to provide smooth light distribution and tritone colour capabilities. Available in different sizes and the option of combining a sensor and/or emergency option, the PURO G4 is a perfect all-round oyster light.


## APPLICATIONS

Bedrooms, Lounge Room, Dining Area, Laundry, Hallways, Staircase, Walk-in Wardrobes, Garage, Education Facilities, Hotel Common Areas, Hotel Rooms, Storage Rooms, Temporary Installations

## DIMENSION DIAGRAMS

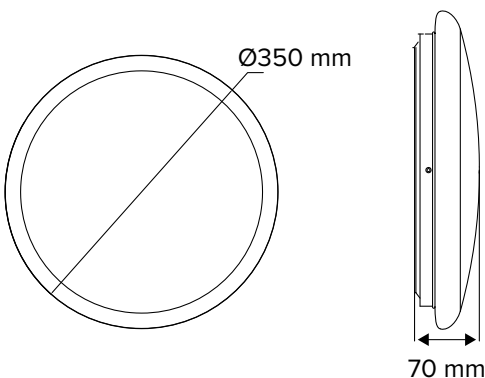

## PHOTOMETRIC DIAGRAM

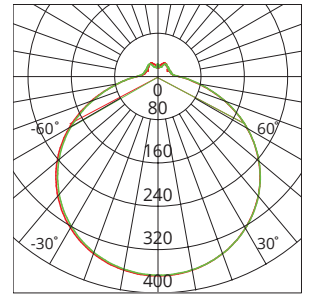

Unit: cd

— C0/180 122.5deg  
— C90/270 122.2deg

Photometric diagram shown is for 4000K output.

## KEY INFORMATION

Power	9 W 12 W 17 W
Lumen Output	850 / 927 / 900 lm 1120 / 1236 / 1200 lm 1700 / 1854 / 1800 lm
Mounting Type	Surface Mount
Dimming Type	Phase-Cut Dimmable (Trailing Edge, 10-100%)
Body Colour	White
IP Rating	IP54
IK Rating	IK04
Operating Ambient Temp.	-20 to 45°C
Connection Type	PA14 Terminals
Driver	Integral
Warranty	5 yrs

## PHOTOMETRIC

Efficacy	94 / 103 / 100 lm/W 93 / 103 / 100 lm/W 100 / 109 / 106 lm/W
CCT	3000 / 4000 / 5700 K
CRI	> 80
SDCM	< 5
UGR	N/A
Beam Angle	120°
Flicker-Free	No
Projected Lifespan	>50,000hrs @ Ta 25°C (L80)

## ELECTRICAL

Input Voltage	220-240Vac, 50/60Hz
Power Factor	> 0.9
Electrical Classification	Class I
Surge Protection	Overload / Short Circuit

## OTHERS

Body Material	Steel
Diffuser Material	PMMA
Rebate Scheme Approvals	N/A
Weight	0.60 kg
Dimensions	Ø350 x 70 mm