


# MD6MH380

NHP MOD6+ Miniature Circuit Breaker MCB 10kA 3 Pole 80A C Curve

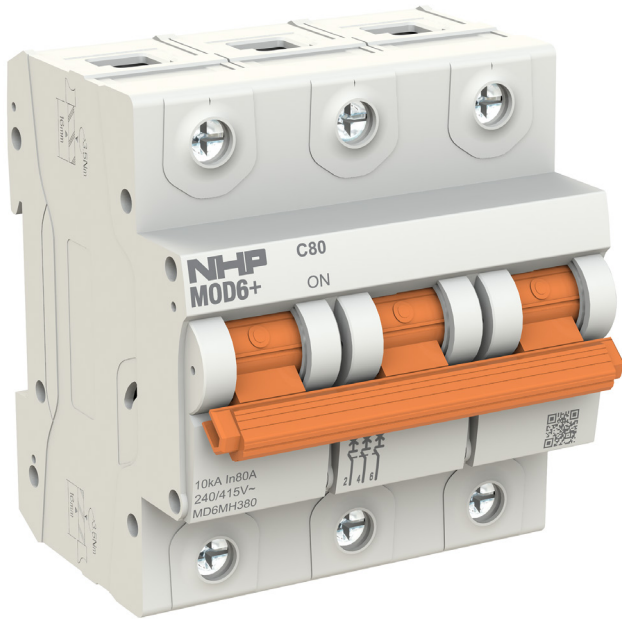

<b>Component type</b>	Miniature circuit breaker (MCB)
<b>Range</b>	MOD6+ Miniature Circuit Breakers
<b>Model</b>	N/A
<b>Product status</b>	New Item

NHP's MOD6+ range of miniature circuit breakers (MCB) offers cost effective solutions while providing core electrical protection, designed to detect and trip on overload and short circuit currents. These MCBs are available with a 6kA short circuit rating, with current ratings from 6-63A in 1P, 2P or 3P in C trip curve and 80-125A in 1P & 3P in C trip curve.

## ELECTRICAL

Rated current	80 A
Number of poles (total)	3
Trip curve	C
Rated voltage	415 V
Frequency	50-60 Hz
Voltage type	AC
Service voltage $U_b$ , AC	12 V
Rated short-circuit breaking capacity $I_{cu}$ according to AS/NZS 60947-2 at 230 VAC	10 kA
Rated short-circuit breaking capacity $I_{cu}$ according to AS/NZS 60947-2 at 400 VAC	10 kA
Max. rated operation voltage $U_e$	456 V
Rated insulation voltage $U_i$	440 V
Rated impulse withstand voltage $U_{imp}$	4 kV

## CONSTRUCTION

Additional equipment possible	No
Number of protected poles	3
Degree of protection (IP)	IP40

## MECHANICAL

Connectable conductor cross section solid-core	1-50 mm <sup>2</sup>
Connectable conductor cross section multi-wired	1-50 mm <sup>2</sup>

## DIMENSIONS

Height	89.5 mm
Width	81 mm
Depth	80.5 mm
Width in number of modular spacings	4.5
Weight	0.58 kg

## ENVIRONMENT

Pollution degree	3
------------------	---

# MD6MH380

NHP MOD6+ Miniature Circuit Breaker MCB 10kA 3 Pole 80A C Curve



## ENVIRONMENT

Rated surrounding temperature without derating	30 °C
Ambient temperature during operating	-25...60 °C