



TRIPROOF^{G2}

TRIPROOF12

SAP CODE: 2002552


Tried and trusted design.

Experience the power of TRIPROOF G2 LED battens, the ultimate weatherproof lighting solution engineered for demanding environments. These robust battens are built to withstand the toughest conditions, making them perfect for industrial settings including manufacturing facilities, as well as any outdoor area where reliability and durability are paramount.

APPLICATIONS

Kitchen / Food Prep, Balconies / Patios / Verandahs, Awnings, Garages, Shed, Carparks, Carports, Side of Building, Storage Facilities, Storage Rooms, Hangers, Manufacturing Facilities, Public Facilities, Temporary Installations, Cool Rooms, Outdoor Recreation, Indoor Recreation, General Industrial

DIMENSION DIAGRAMS

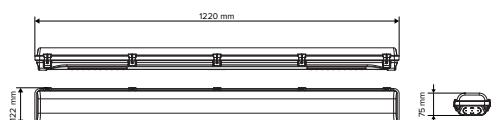

Disclaimer

NOTE1: CRI Value measured at 4K CCT


NOTE2: 100,000hr lifespan on LED chips

haneco.com.au

Specification subject to change without prior notice. Last updated 16/10/2024



PHOTOMETRIC DIAGRAM



Unit: cd

— C0/180,125.0

— C90/270,107.1

Photometric diagram shown is for 4000 K output.

KEY INFORMATION

Power	20 W 26 W 34 W 40 W
Lumen Output	2716 / 2891 / 2841 lm 3332 / 3618 / 3515 lm 3821 / 4207 / 4050 lm 4404 / 4872 / 4626 lm
Mounting Type	Surface Mount / Suspended
Dimming Type	Non-Dimmable
Fascia Colour	Grey
IP Rating	IP65
IK Rating	IK08
Operating Ambient Temp.	-20 to 45 °C
Connection Type	PA14 Terminals
Driver	Built-in
Warranty	5 yrs

PHOTOMETRIC

Efficacy	20 W: 131 / 146 / 137 lm/W 26 W: 126 / 143 / 132 lm/W 34 W: 121 / 141 / 128 lm/W 40 W: 117 / 138 / 123 lm/W
CCT	3000 / 4000 / 5000 K
CRI	> 85
SDCM	< 3
UGR	< 25
Beam Angle	120°
Flicker-Free	Yes
Projected Lifespan	> 100,000hrs @ Ta 45°C(L80)

ELECTRICAL

Input Voltage	220-240Vac, 50/60Hz
Power Factor	> 0.9
Electrical Classification	Class I
Surge Protection	Overload / Short Circuit

OTHERS

Body Material	Polycarbonate
Diffuser Material	Polycarbonate (Opal)
Cable Entry	Both ends; Top
Rebate Scheme Approvals	
HACCP Approval	No
Weight	2.35 kg
Dimensions	1220 x 122 x 75 mm