

Stingray Exit Light Gen3

A stylish, modern quick-connect, and efficient LED exit luminaire designed for interior exit sign applications

- Suitable for both ceiling and wall mounting
- Replaceable lithium iron phosphate (LiFePO4) battery
- Features manual testing and maintained emergency exit functionality, complete with all pictogram inserts



IP20

Ingress
Protection
Rating



0 to 40

Operating
Temperature



50,000hrs
(L70/B10)

Lifetime



5 Years

Warranty

CODE	SYSTEM POWER	DIMENSIONS	LUMINAIRE COLOUR	INRUSH CURRENT	INRUSH CURRENT DURATION	LINE CURRENT	CLASSIFICATION
STINGBKG3	4.2W	L399.80 x W81.50 x H249 mm	Black	20A	140µs	0.04A	C90/C270: D6.3 C0/C180: D8;
STINGWHG3	4.2W	L399.80 x W81.50 x H249 mm	White	20A	140µs	0.04A	C90/C270: D6.3 C0/C180: D8;

OPTION	BATTERY	BATTERY CHARGE	BATTERY VOLTAGE	TESTING SYSTEM
Maintained	LiFePO4	2hr	6.4V	Manual

ACCESSORY CODE	DESCRIPTION
BLADEPROSUSKITWH	Rod and Wire Mounted Kit for Stingray and Balde (Rod and wire excluded)
DGLCEM1500/1L11	Battery LiFePO4 1 Cell 3.2V 1500mAh

AS/NZS 2293.1:2018 Classification Table


STINGWHG3 C0/C180: D8 C90/C270 :D6.3			
Allowable Luminaire Mounting Height (m)	Luminaire Maximum Spacing for each Plane (M)		
	C0	C90 / C270	C180
2.1	9.4	8.5	9.4
2.4	9.7	8.8	9.7
2.7	9.9	8.9	9.9
3	10.1	9.1	10.1

STINGWHG3

STINGWHDAG3 & STINGWHDAGT3 C0/C180: D10 C90/C270 :D8			
Allowable Luminaire Mounting Height (m)	Luminaire Maximum Spacing for each Plane (M)		
	C0	C90 / C270	C180
2.1	10.2	9.4	10.2
2.4	10.5	9.7	10.5
2.7	10.8	9.9	10.8
3	11	10.1	11

STINGWHDAG3, STINGWHDAGT3

Line Drawings

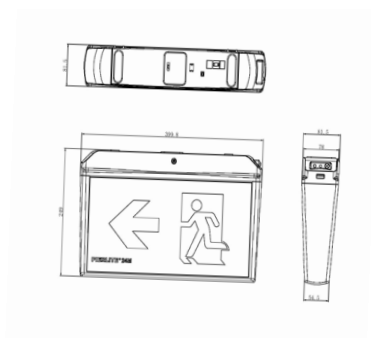



STINGWHG3



STINGWHG3



STINGBKG3



STINGBKG3



STINGBKG3